


USP32


Unità di bloccaggio e centraggio fori pneumatica
UNICLAMP

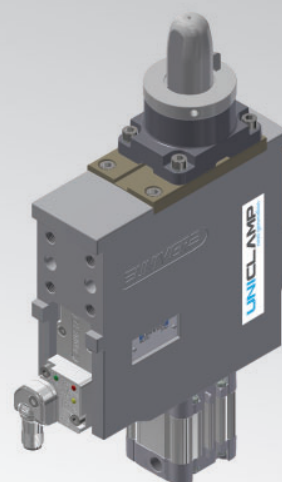

U	S	P	3	2	J	3	1	-	-	-	K	0
1	2	3	4	5	6	7	8	9				


1	Serie	2	Versione	3	Taglia
	US = Unità di bloccaggio e centaggio fori UNICLAMP, con compensazione		P = Pneumatica		32 = Ø 32 mm
4	Modello	5	Diametro perno	6	Presenza perno di centraggio
	J = Standard R = Con sblocco/blocco meccanico		1 <= Ø 19 mm 2 = Ø 20 mm 3 = Ø 25 mm 4 = Ø 30 mm 5 = Ø 35 mm 6 = Ø 40 mm Per altri Ø perno rivolgersi all'Ufficio Commerciale		0 = Perno di centraggio non incluso 1 = Perno di centraggio incluso
7	Numerazione progressiva	8	Sensore	9	Revisione prodotto
	Numerazione progressiva per prodotto speciale a cura dell'Ufficio Commerciale		K = Sensore elettronico PNP (ottico) (DF-K) N = Senza sensore (con piastra di chiusura)		Assegnato da UNIVER

USP32J_0_ _ _ K0

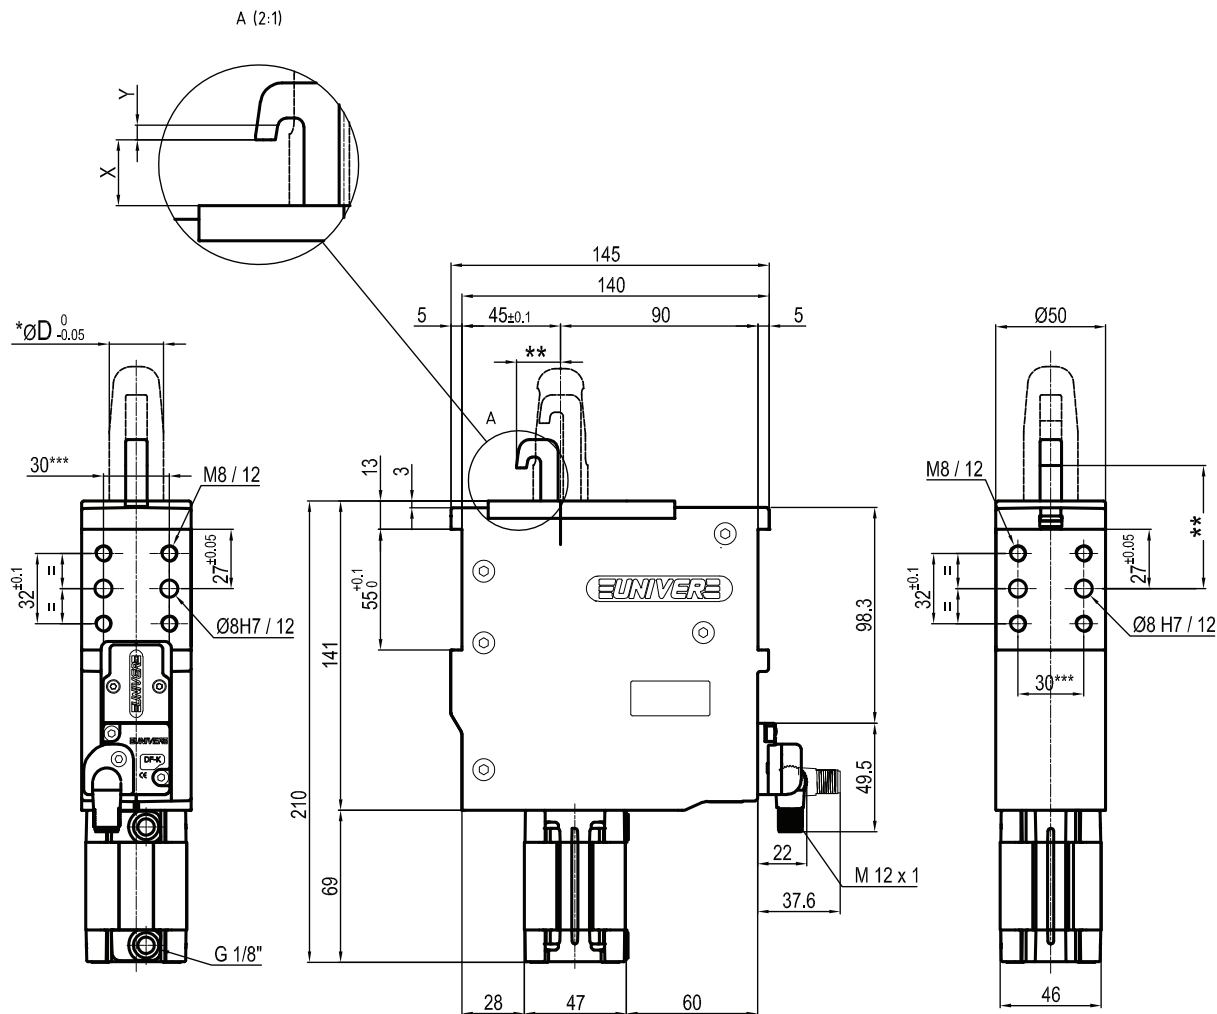

*	ØD
1	18
2	20
3	25
4	30
5	35
6	40

Pin material:
hardened steel

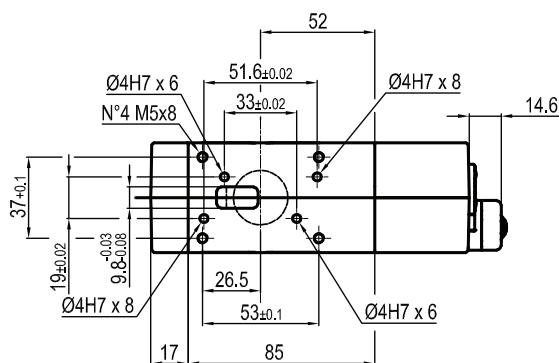

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
32 mm	1500 N	2,6 Kg

** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS

*** : TOLERANCE BETWEEN DOWEL HOLES $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

X= metal sheet

Y = clamping range (X + 1,2 mm Max)

Subject to technical modifications without notice

Rev. 00 10.06.20

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**


Electronic sensor with M12 swivel connector,

from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc


IP code: **IP 65**

USP32J_1___K0

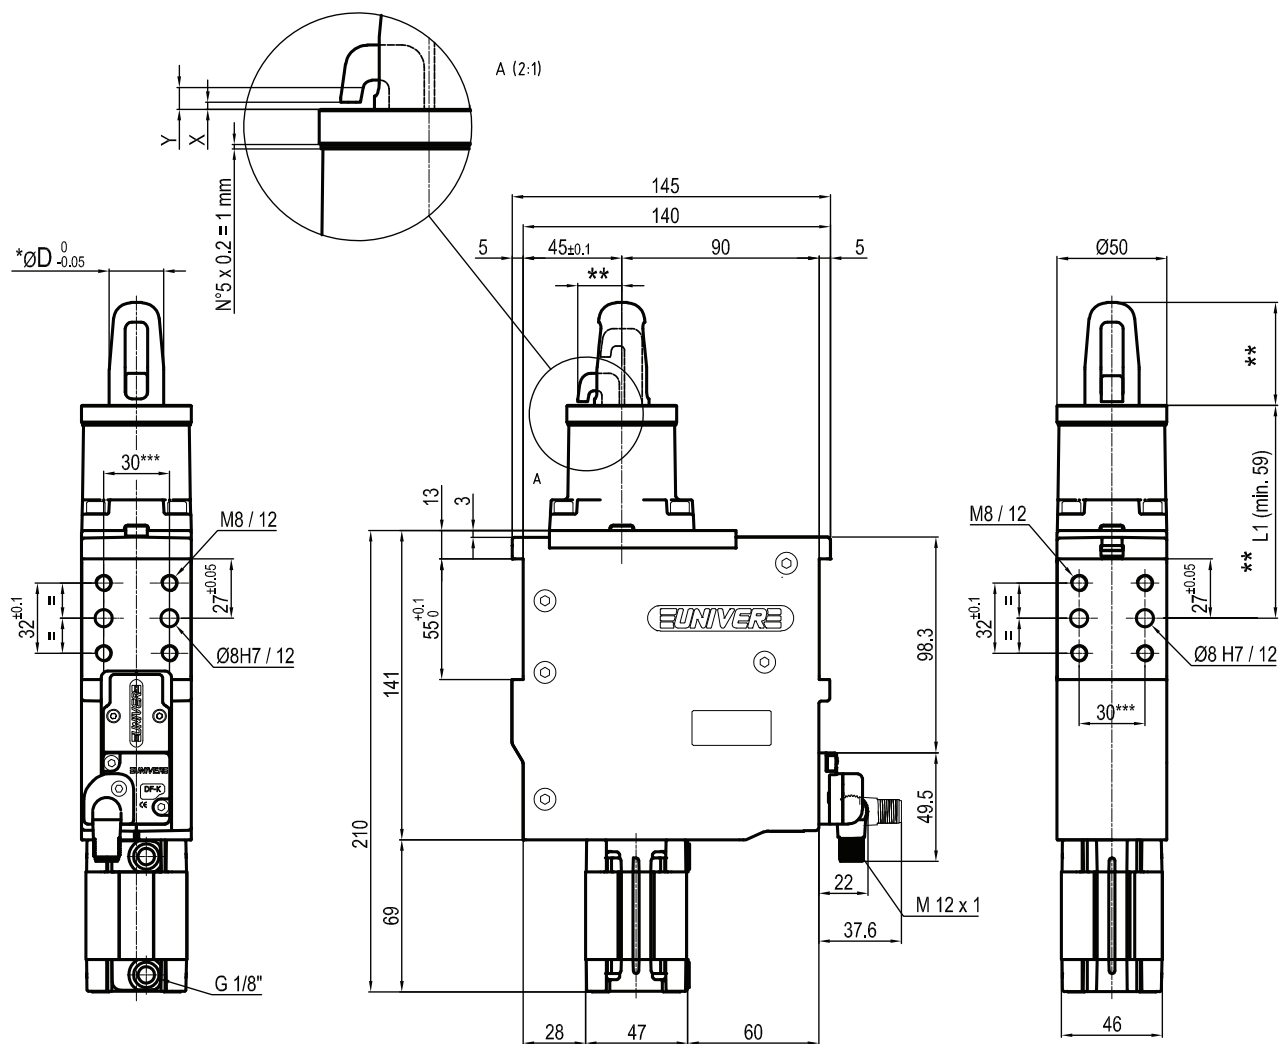

*	ØD
1	18
2	20
3	25
4	30
5	35
6	40

Pin material:
hardened steel

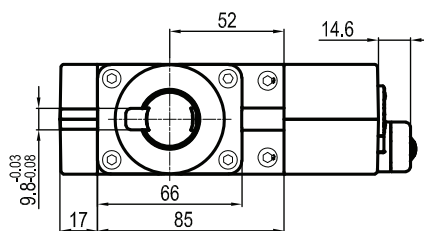

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
32 mm	1500 N	2,6 Kg

** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS
 *** : TOLERANCE BETWEEN DOWEL HOLES $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

X= metal sheet


Y = clamping range (X + 1,2 mm Max)

Subject to technical modifications without notice

Rev. 01 16.10.20

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Electronic sensor with M12 swivel connector,
 from 0° to 90°, in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**

USP32R_0_ _ _ K0

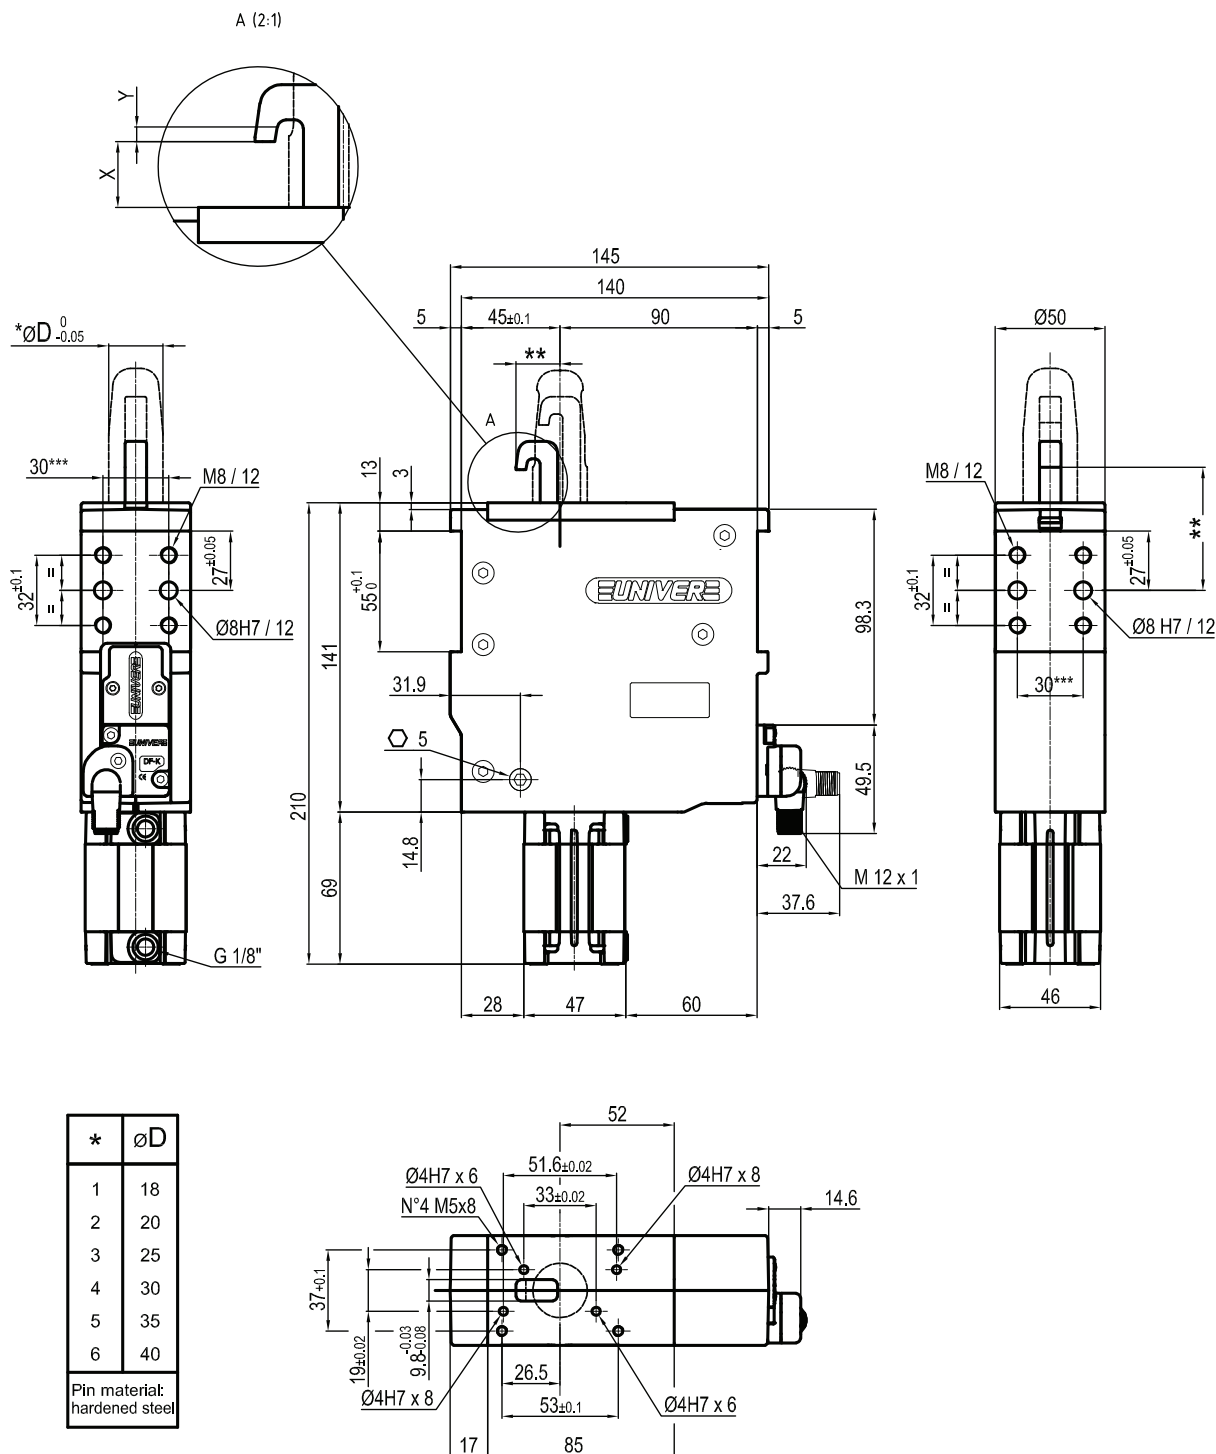

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
32 mm	1500 N	2,9 Kg

** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS

*** : TOLERANCE BETWEEN DOWEL HOLES $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

X= metal sheet

Y = clamping range (X + 1,2 mm Max)

Subject to technical modifications without notice

Rev. 00 11.06.20

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**


Electronic sensor with M12 swivel connector,

from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc


IP code: **IP 65**

USP32R_1_ _ _ K0

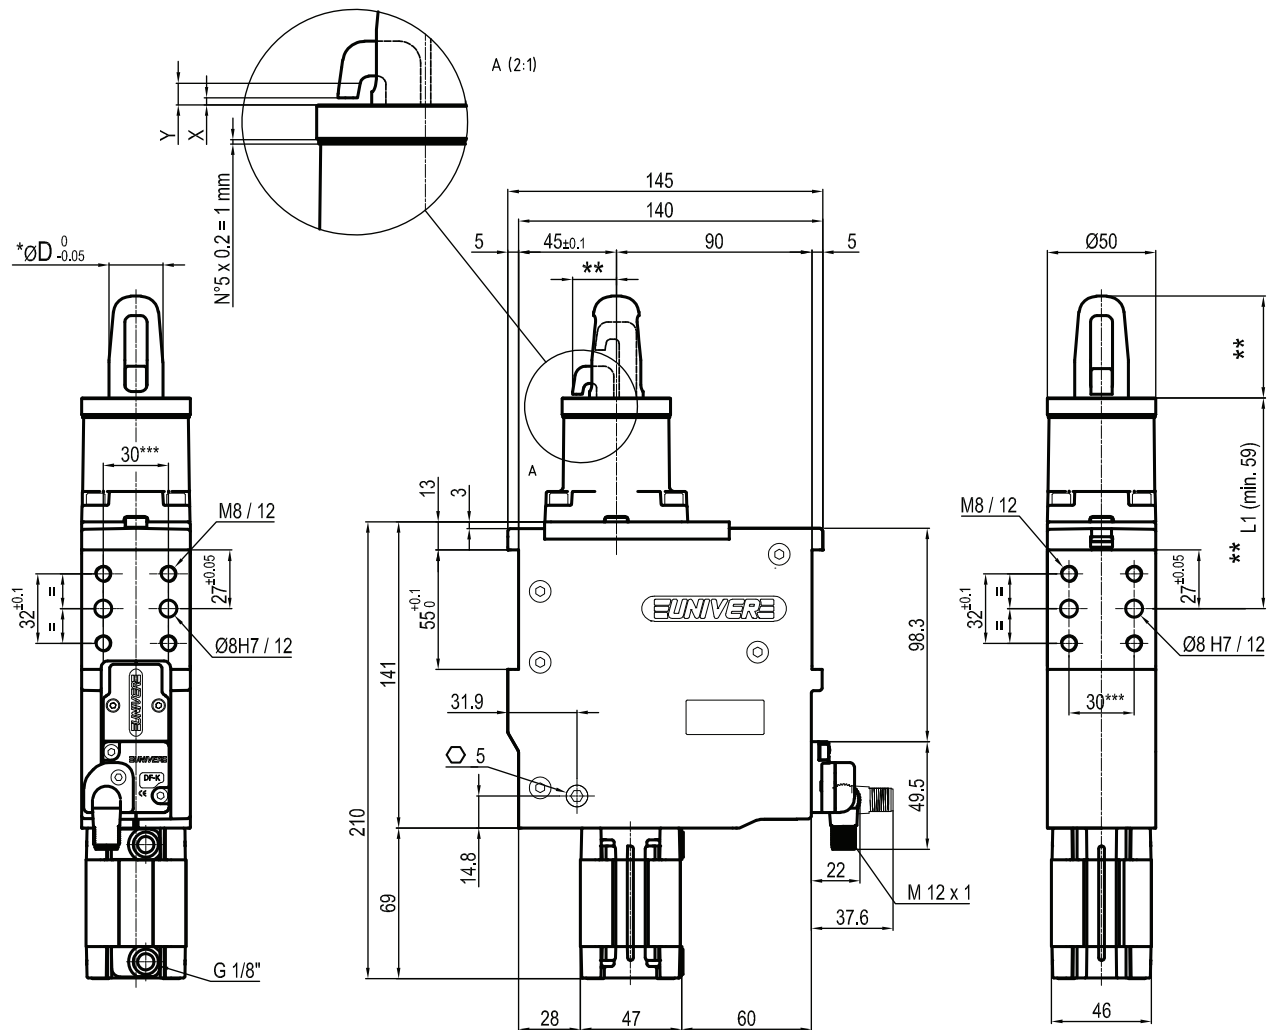

*	ØD
1	18
2	20
3	25
4	30
5	35
6	40

Pin material:
hardened steel

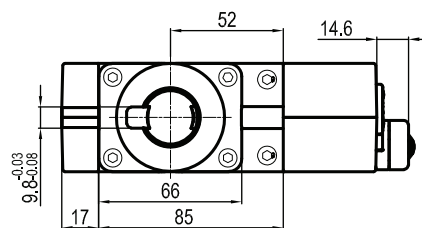

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
32 mm	1500 N	2,9 Kg

** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS
*** : TOLERANCE BETWEEN DOWEL HOLES $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

X= metal sheet

Y = clamping range (X + 1,2 mm Max)

Subject to technical modifications without notice

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Electronic sensor with M12 swivel connector,
 from 0° to 90°, in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**