


UPD02


UNICLAMP Marking units, single character

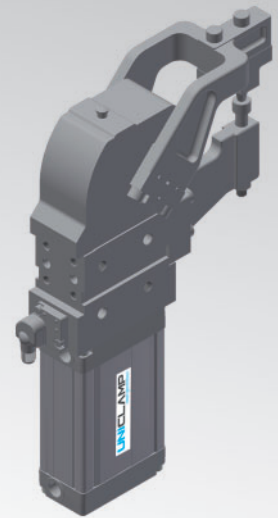

U	P	D	0	2	0	8	O	R	M	0	0	F	0
1			2		3		4		5	6		7	8

1 Series	2 Version	3 Size
UPD = UNICLAMP Marking units single character	02 = 250 Nm, Ø 63 mm cylinder	08 = 84 mm
4 Opening angle	5 Character mounting position	6 Character
OR = 120° adjustable	M = On the moving part F = On the fixed part	00 = Standard version (without character)
		Progressive numbers are assigned by the Sales dept.
7 Connections	8 Product revision	
F = Front side (in front of the sensor) P = Rear side (same side as sensor)	Assigned by UNIVER	

UPD0208ORF__F0

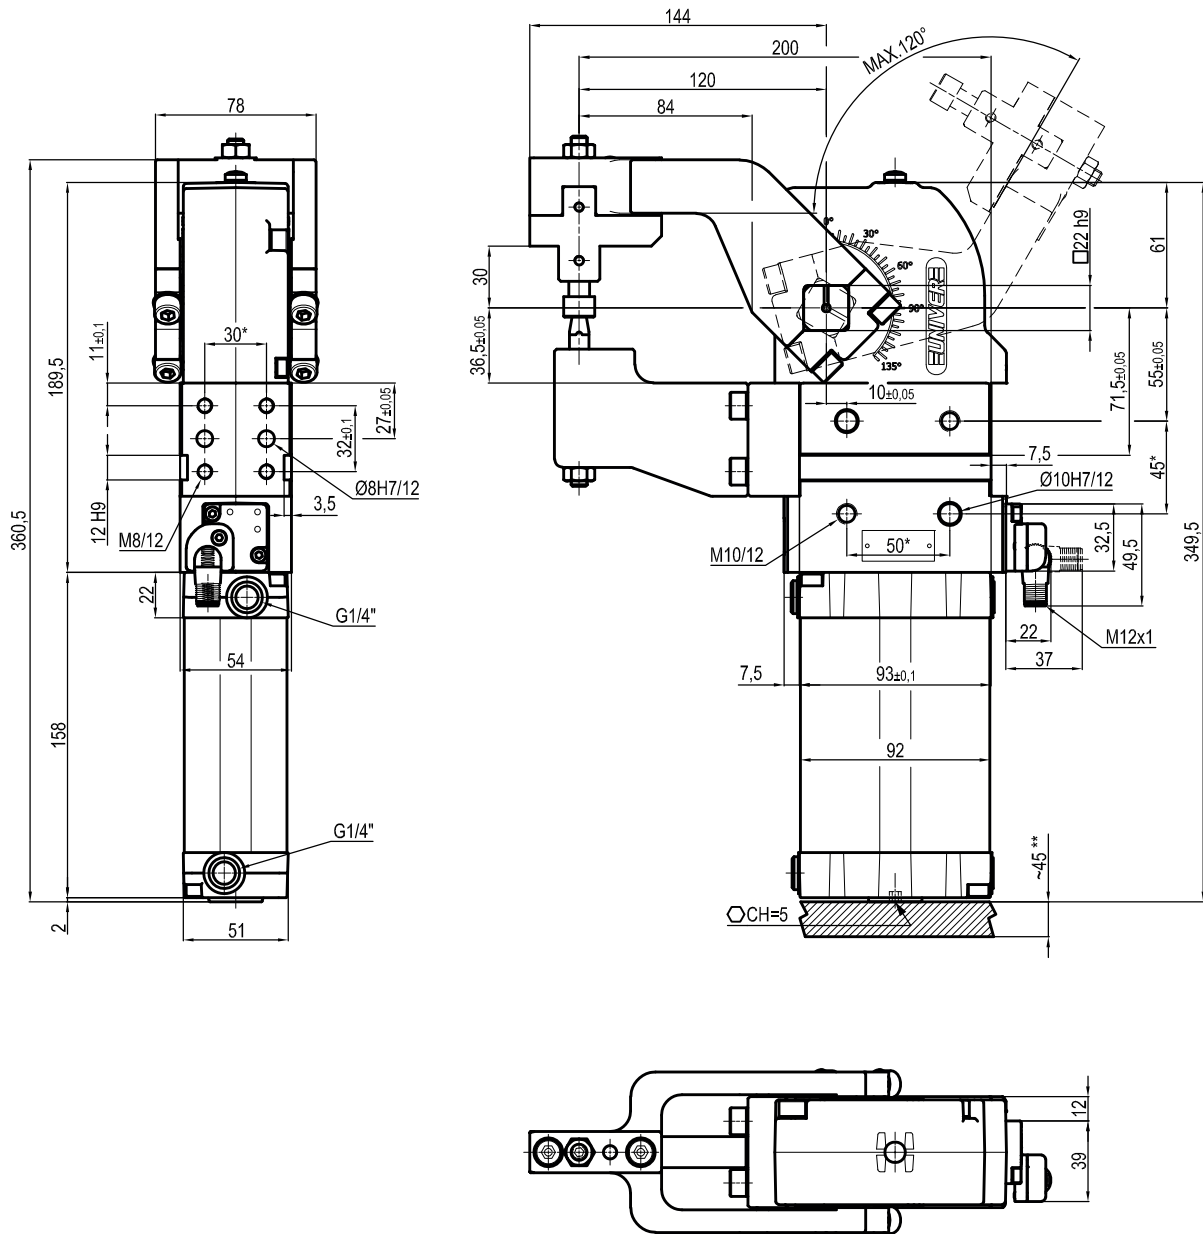


Bore Ø	Clamping moment (0,5 MPa)	Marking force (0,5 MPa)	Air/Cycle (0,5 MPa)	Weight
63 mm	250 Nm	2 KN	3,4 NI	6,1 Kg

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ***: AREA TO ACCES ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ± 45° C**
 Opening angle: **adjustable from 0° to 120°**
 Pneumatic ports on both sides
 Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°
 IP code: **IP 65**
 Pneumatic ports on both sides

UPD0208ORM__F0

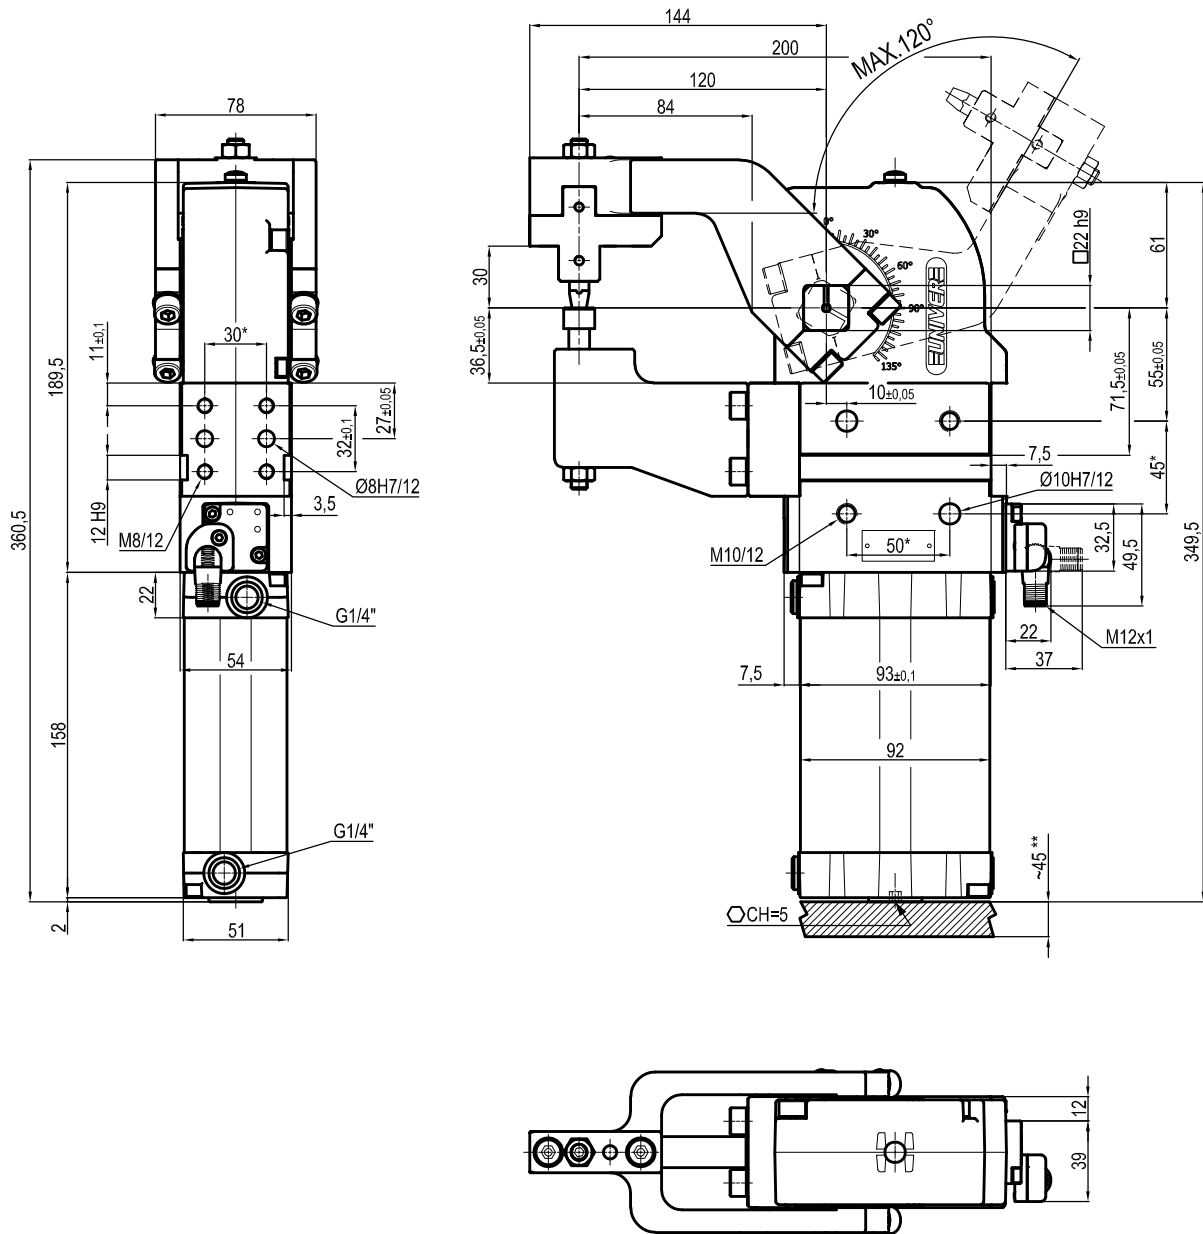

Bore Ø	Clamping moment (0,5 MPa)	Marking force (0,5 MPa)	Air/Cycle (0,5 MPa)	Weight
63 mm	250 Nm	2 KN	3,4 NI	6,1 Kg

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ***: AREA TO ACCES ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ± 45° C**
 Opening angle: **adjustable from 0° to 120°**
 Pneumatic ports on both sides
 Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°
 IP code: **IP 65**
 Pneumatic ports on both sides