



# UAGP

## UNICLAMP Pneumatischer Schwenker

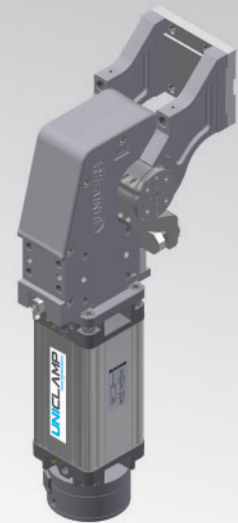


U	A	G	P	0	8	0	O	A	0	9	0	M	S	0
1	2	3	4	5	6	7	8	9						

1 Series	2 Modell	3 Größe
<b>UAG</b> = UNICLAMP Schwenkeinheit mit fest voreingestelltem Öffnungswinkel	<b>P</b> = Pneumatisch	<b>075</b> = 75Nm Ø80 mm <b>080</b> = 60Nm Ø80 mm <b>120</b> = 110Nm Ø100 mm <b>150</b> = 120Nm Ø100 mm <b>155</b> = 120Nm Ø100 mm <b>170</b> = 170Nm Ø125 mm <b>210</b> = 210Nm Ø125 mm
		<b>215</b> = 210Nm Ø125 mm <b>300</b> = 300Nm Ø160 mm <b>350</b> = 350Nm Ø160 mm <b>355</b> = 350Nm Ø160 mm <b>600</b> = 600Nm Ø200 mm <b>605</b> = 600Nm Ø200 mm
4 Einbaulage Drehtisch	5 Sensor	6 Öffnungswinkel
<b>V</b> = Senkrecht 180° <b>O</b> = Waagrecht 90° <b>Z</b> = Senkrecht, V Lage gespiegelt <b>P</b> = Waagrecht, O Lage gespiegelt (Öffnungswinkel Max. 60°)	<b>K</b> = PNP Elektronischer Sensor (optisch) für Öffnungswinkel (DF-K) <b>A</b> = PNP Elektronischer Sensor (optisch) für Öffnungswinkel (DF-K) + Bremssensor (DF-U)	<b>120</b> = 120° <b>090</b> = 90° <b>060</b> = 60° <b>045</b> = 45°
7 Feststellbremse	8 Luftanschlüsse	9 Produkt Revision
<b>B</b> = Mit Feststellbremse <b>W</b> = Ohne Feststellbremse <b>M</b> = Mit Bremse und manuelle Override-Funktion	<b>S</b> = Linksseitig <b>D</b> = Rechtsseitig <b>F</b> = Vorne <b>P</b> = Rückseitig	von UNIVER vergeben


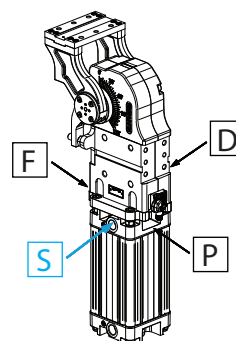


UNIVER SpA empfiehlt, dass die UNIVER Technikabteilung alle Schwenker Anwendungen freigibt

## UAGP0800K\_\_WS0

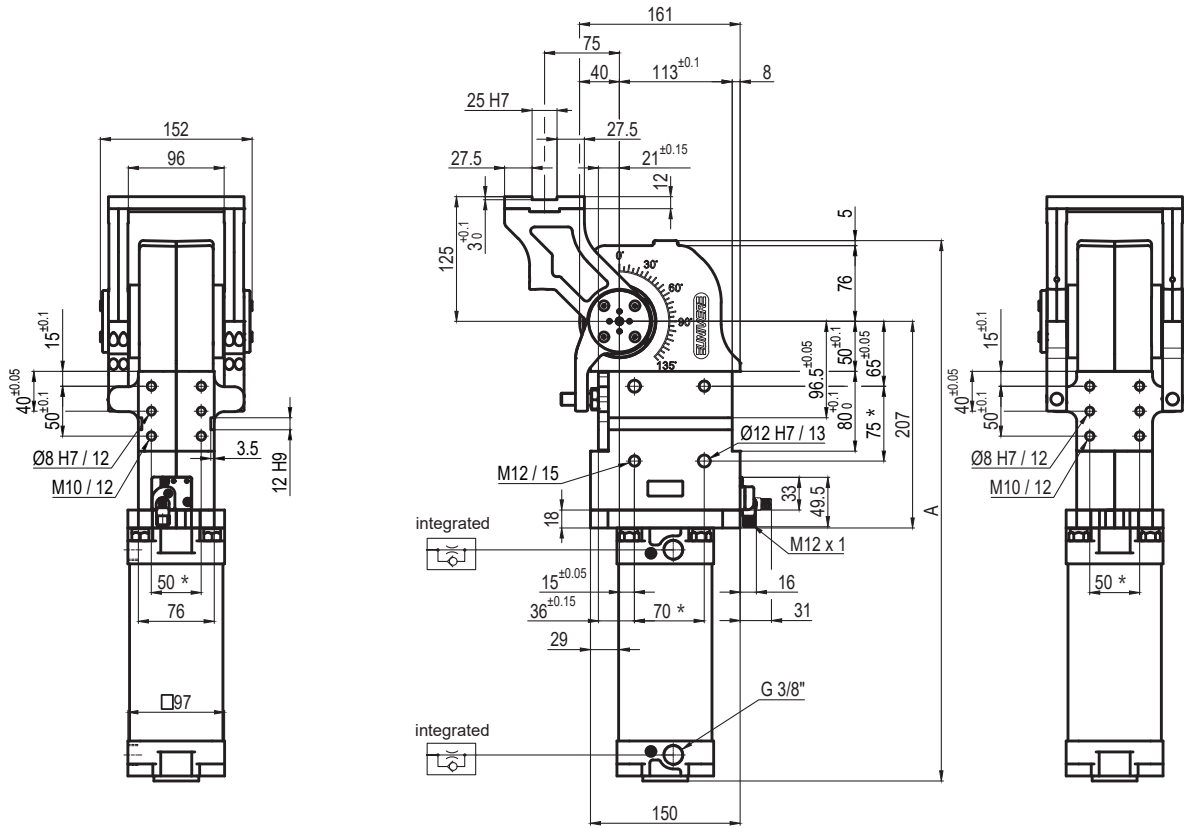

Pivot rotation in degrees	A
45°	480
60°	491.5
90°	516.5
120°	541.5

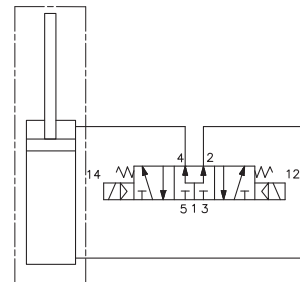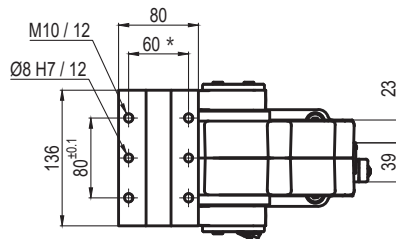


Size	Holding moment	Max. torque at the rotary table 0,55 MPa	Weight
80	4000 Nm	60 Nm	18,2 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**  
 Operating temperature: **5° ÷ 45° C**  
 Predetermine pivot rotation in degrees: **45°- 60°- 90°- 120°**  
 Rotary table position: **Horizontal 90°**  
 Electronic sensor with M12 swivel connector, from 0° or 90°, in steps of 10°  
 Supply voltage: 10 ÷ 30 Vdc  
 IP code: **IP 65**

\*: TOLERANCE BETWEEN DOWEL HOLES ± 0,02, BETWEEN SCREW HOLES ± 0,1

Subject to technical modifications without notice

## UAGP080PK\_\_WSO

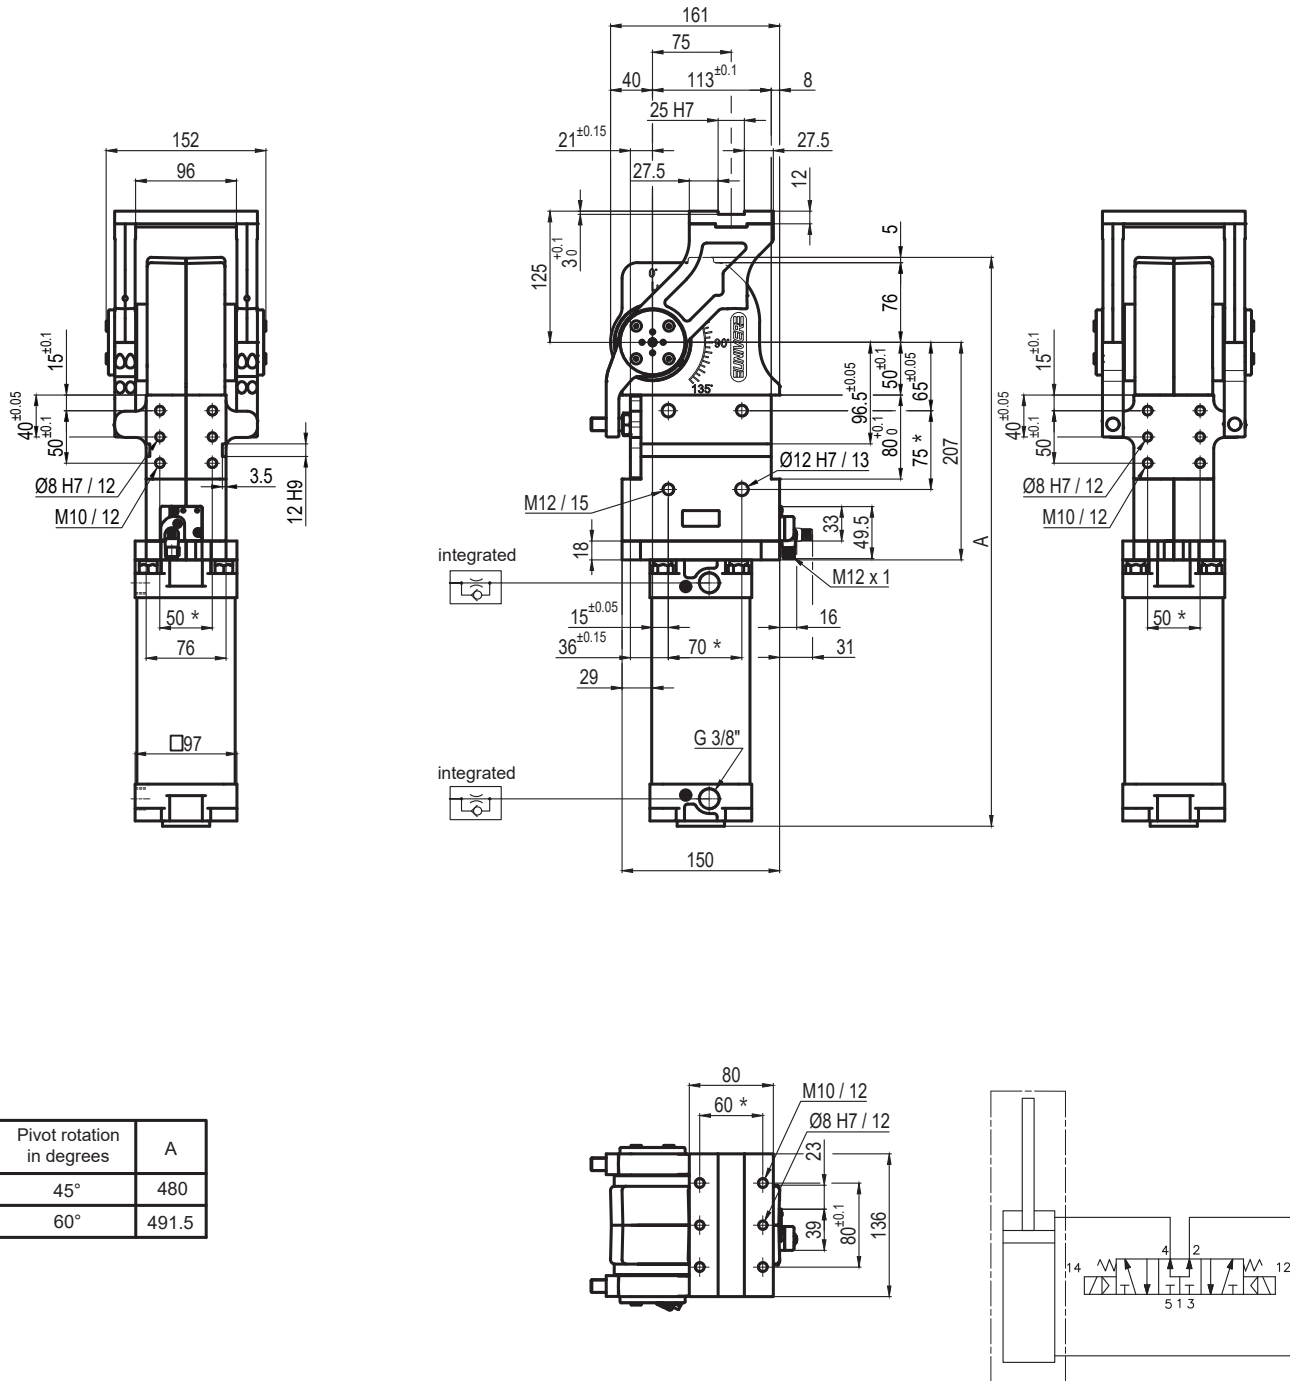


Size	Holding moment	Max. torque at the rotary table 0,55 MPa	Weight
80	4000 Nm	60 Nm	15 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**  
 Operating temperature: **5° ÷ 45° C**  
 Predetermine pivot rotation in degrees: **45°- 60°**  
 Rotary table position: **Horizontal mirror of O**  
 Electronic sensor with M12 swivel connector, from 0° or 90°, in steps of 10°  
 Supply voltage: 10 ÷ 30 Vdc  
 IP code: **IP 65**



\*: TOLERANCE BETWEEN DOWEL HOLES ± 0,02, BETWEEN SCREW HOLES ± 0,1

Subject to technical modifications without notice

## UAGP080VK\_\_WSO

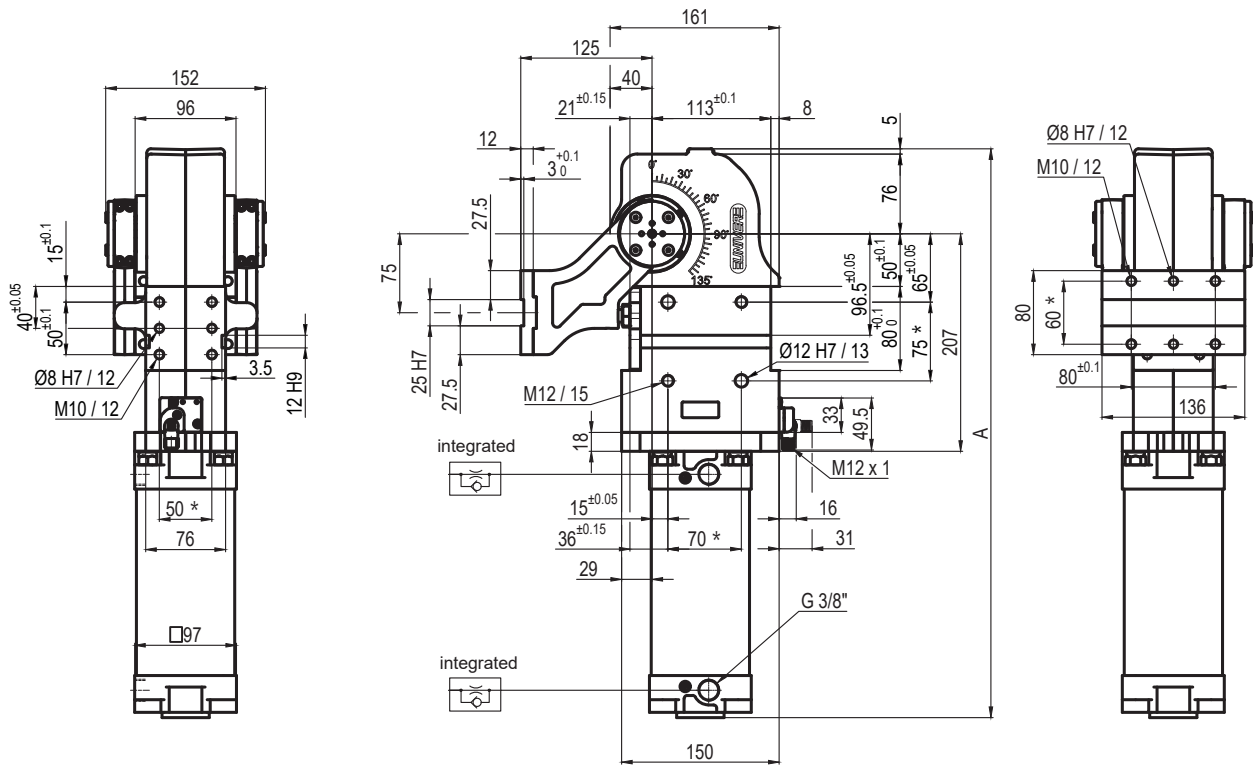

Pivot rotation in degrees	A
45°	480
60°	491.5
90°	516.5
120°	541.5

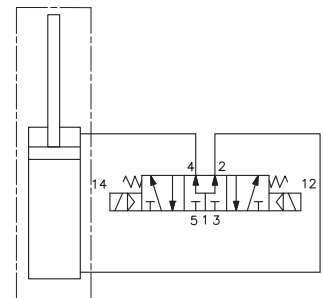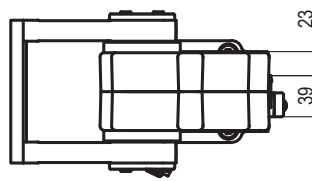

Size	Holding moment	Max. torque at the rotary table 0,55 MPa	Weight
80	4000 Nm	60 Nm	15 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**  
 Operating temperature: **5° ÷ 45° C**  
 Predetermine pivot rotation in degrees: **45°- 60°- 90°- 120°**  
 Rotary table position: **Vertical 180°**  
 Electronic sensor with M12 swivel connector, from 0° or 90°, in steps of 10°  
 Supply voltage: 10 ÷ 30 Vdc  
 IP code: **IP 65**

\*: TOLERANCE BETWEEN DOWEL HOLES ± 0,02, BETWEEN SCREW HOLES ± 0,1

Subject to technical modifications without notice

