


UCBL450

Unità di bloccaggio manuali UNICLAMP

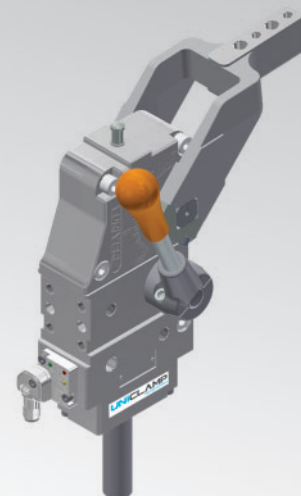

U	C	B	L	4	5	0	V	E	A	K	0
1	2	3	4	5	6	7	8	9	10		

1 Serie	2 Standard	3 Versione	4 Fissaggio
---------	------------	------------	-------------

UC = Unità di bloccaggio manuali UNICLAMP con regolazione continua angolo d'apertura da: **0° a 135° max**
L'angolo di apertura può variare a seconda della posizione e della tipologia del pressore

B = Standard europeo

L = Unità di bloccaggio manuale con leva manuale

4 = Sui 4 lati


5 Taglia	6 Posizione pressore	7 Tipo di pressore
----------	----------------------	--------------------

50 = Ø 50

V = 90°

O = 180°

N = No arm

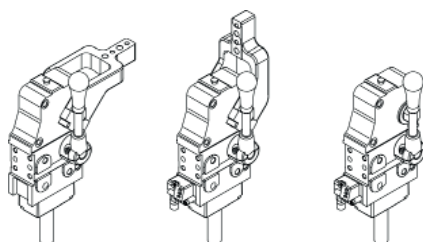

C = Centrale, 15 mm Offset

D = Destro, 15 mm Offset

S = Sinistro, 15 mm Offset

E = Centrale, 45mm Offset

F = Destro, 45mm Offset

L = Sinistro, 45mm Offset

X* = Centrale, con fori maggiorati Ø 8 H7, 15 mm offset

Y* = Destro, con fori maggiorati Ø 8 H7, 15 mm offset

Z* = Sinistro, con fori maggiorati Ø 8 H7, 15 mm offset

T* = Centrale, con fori maggiorati Ø 8 H7, 45 mm offset (solo per UCBL450)

U* = Destro, con fori maggiorati Ø 8 H7, 45 mm offset (solo per UCBL450)

V* = Sinistro, con fori maggiorati Ø 8 H7, 45 mm offset (solo per UCBL450)

N = Senza pressore

* = Disponibile su richiesta

8 Materiale pressore	9 Sensore	10 Revisione prodotto
----------------------	-----------	-----------------------

A = Alluminio

S = Acciaio


N = Senza pressore

N = Senza sensore

(con piastra di chiusura)

K = Sensore elettronico PNP (ottico) (DF-K)

Assigned by UNIVER




Operating temperature: $5^{\circ} \div 45^{\circ} \text{C}$
 Opening angle: **adjustable**
 Without arm
 With manual lever
 Electronic sensor with M12 swivel connector, from 0° to 90° ,
 in steps of 10°
 Supply voltage: $10 \div 30 \text{ Vdc}$
 IP code: **IP 65**

Subject to technical modifications without notice

UCBL450O__K0

15 mm

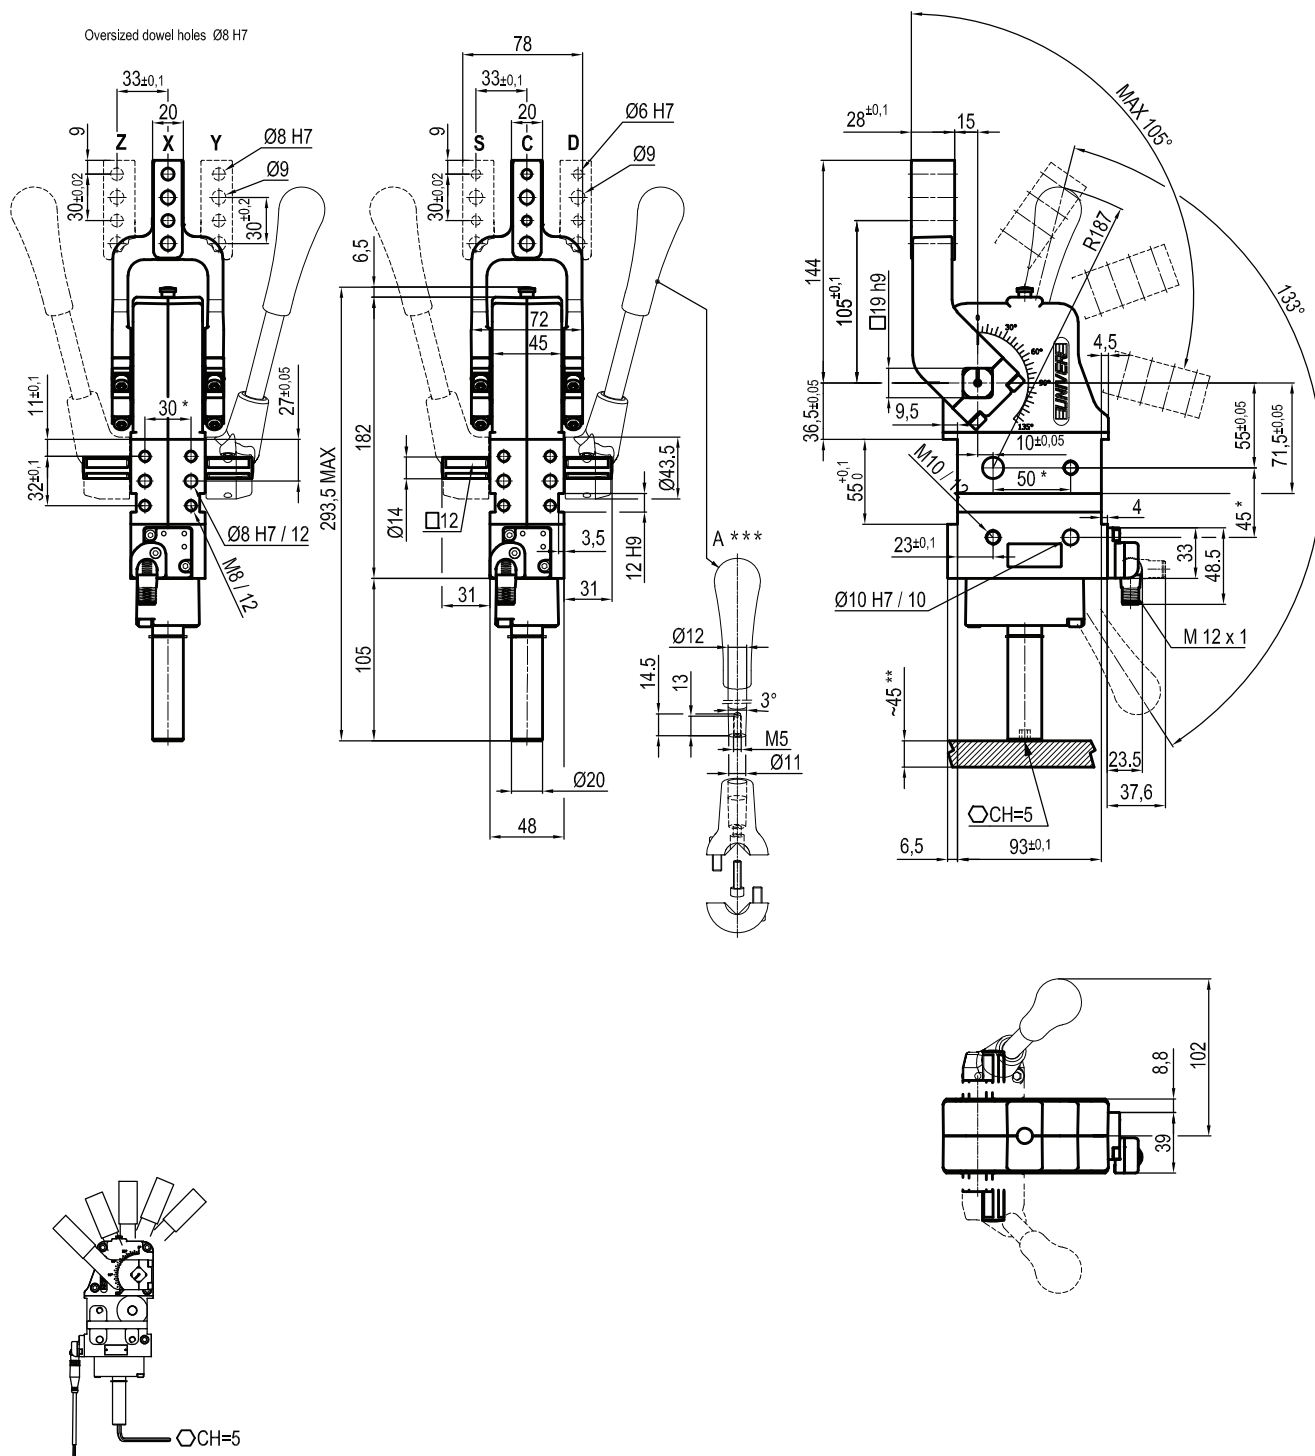

Size	Holding moment	Clamping moment	Weight (clamping arm not included)
50	1750 Nm	420 Nm	2,8 Kg

*: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**: AREA TO ACCESS ANGLE ADJUSTMENT

***: DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

Operating temperature: 5°÷ 45° C

Opening angle: **adjustable from 0° to 105°**

Arm position: **180°**

With manual lever

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**

Subject to technical modifications without notice

Rev. 00 05.11.19

15 mm




Operating temperature: 5° ÷ 45° C
Opening angle: **adjustable from 0° to 135°**
Arm position: **90°**
With manual lever
Electronic sensor with M12 swivel connector, from 0° to 90°,
in steps of 10°
Supply voltage: 10 ÷ 30 Vdc
IP code: **IP 65**

***: DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

Rev. 00 05.11.19

UCBL450O__K0

45 mm

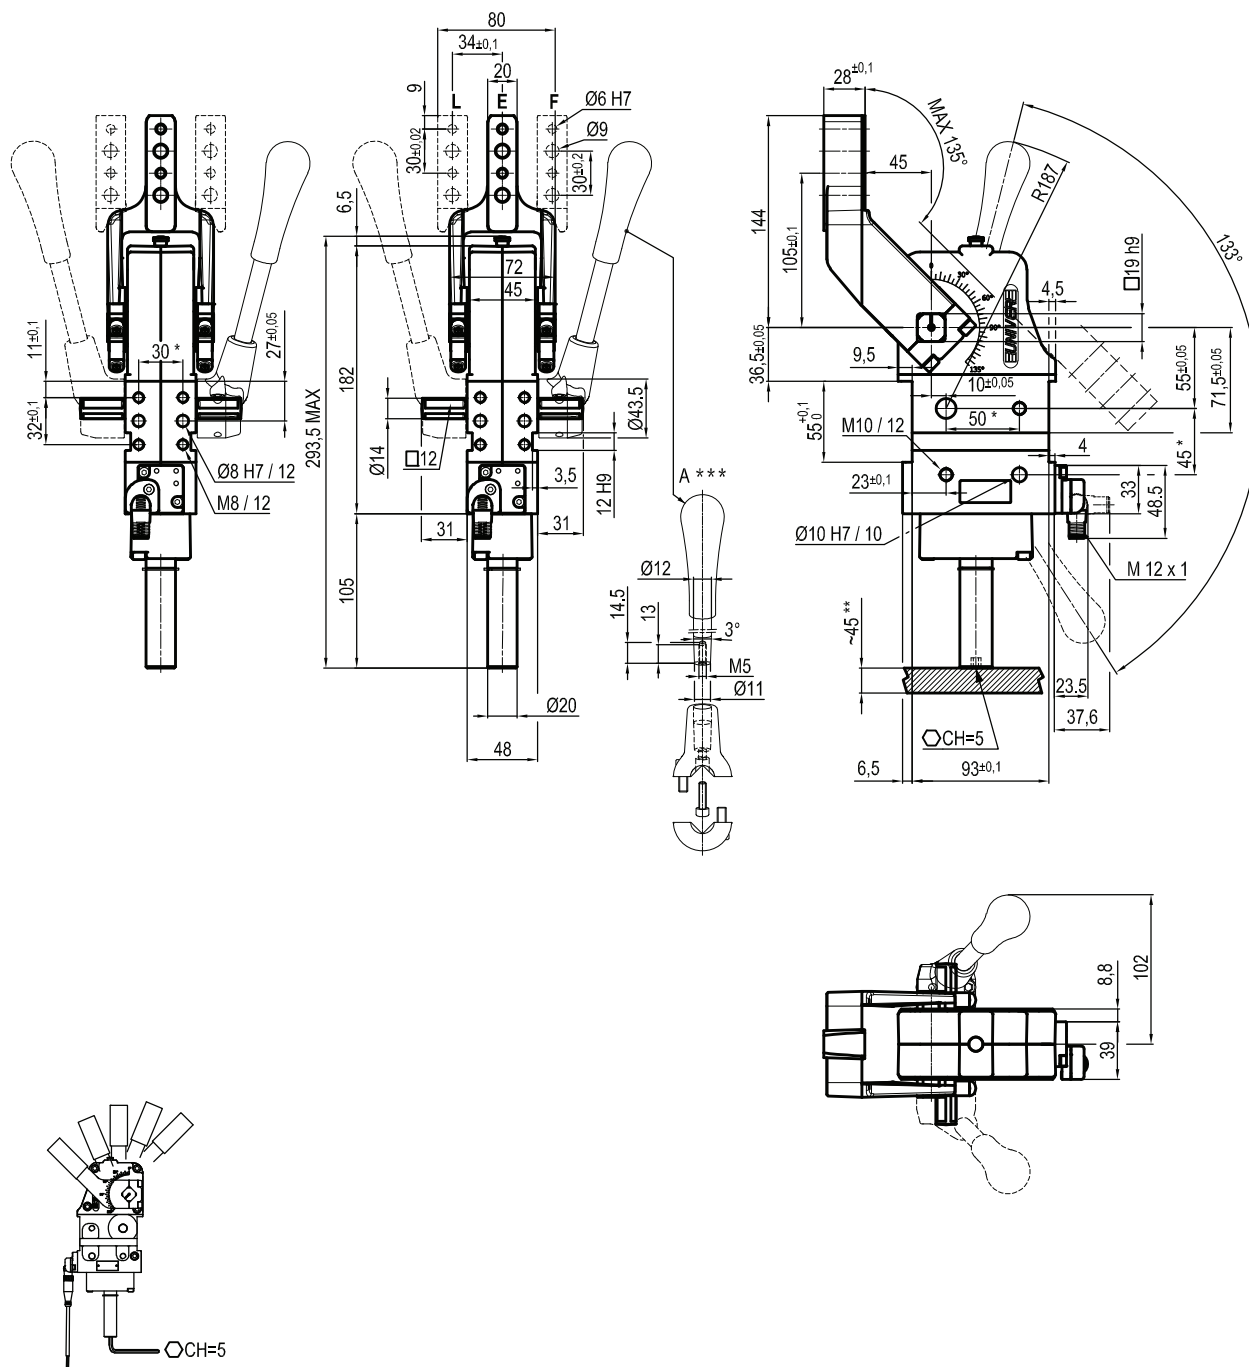

Size	Holding moment	Clamping moment	Weight (clamping arm not included)
50	1750 Nm	420 Nm	2,8 Kg

*: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**: AREA TO ACCESS ANGLE ADJUSTMENT

***: DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

Operating temperature: 5°÷ 45° C

Opening angle: **adjustable from 0° to 135°**

Arm position: **180°**

With manual lever

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°


Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**

Subject to technical modifications without notice

Rev. 00 19.09.19

45 mm



Rev. 00 19.09.19

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable from 0° to 135°**
 Arm position: **90°**
 Electronic sensor with M12 swivel connector, from 0° to 90°,
 in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**