
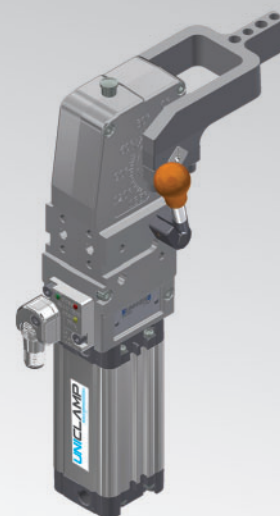


UCBM32





UNICLAMP Miniclamp

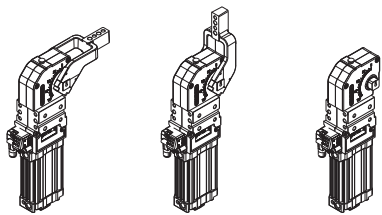

U	C	B	M	3	2	O	E	A	K	0
1	2	3	4	5	6	7	8	9		

1 Serie	2 Standard	3 Versione	4 Taglia
UC = Unità di bloccaggio UNICLAMP con regolazione continua angolo d'apertura da: 0° a 105° Max L'angolo di apertura può variare a seconda della posizione e della tipologia del pressore	B = Standard europeo	M = Pneumatica con leva manuale	32 = Ø 32 mm
5 Posizione pressore	6 Tipo di pressore	7 Materiale pressore	
V = 90° O = 180° N = Senza pressore 	B = Centrale, 0 mm Offset C = Centrale, 10 mm Offset E = Centrale, 25 mm Offset N = Senza pressore	A = Alluminio N = Senza pressore	
8 Sensore	9 Revisione prodotto		
N = Senza sensore (con piastra di chiusura) K = Sensore elettronico PNP (ottico) (DF-K) D = Sensore pneumatico J = Sensore elettronico NPN (ottico) (DF-J) Y = Sensore elettronico PNP (ottico) (DF-Y) led bianco	Assegnato da UNIVER		

UCBM32NNNK0

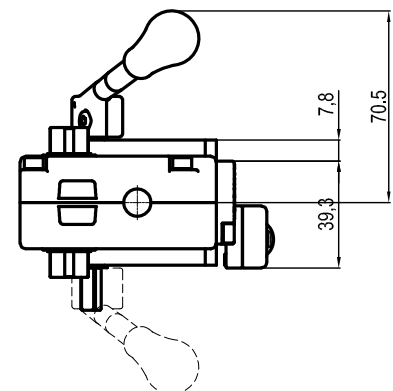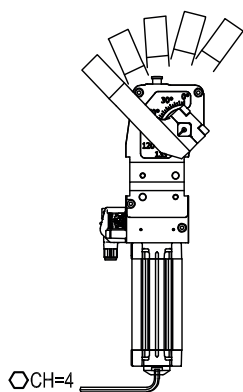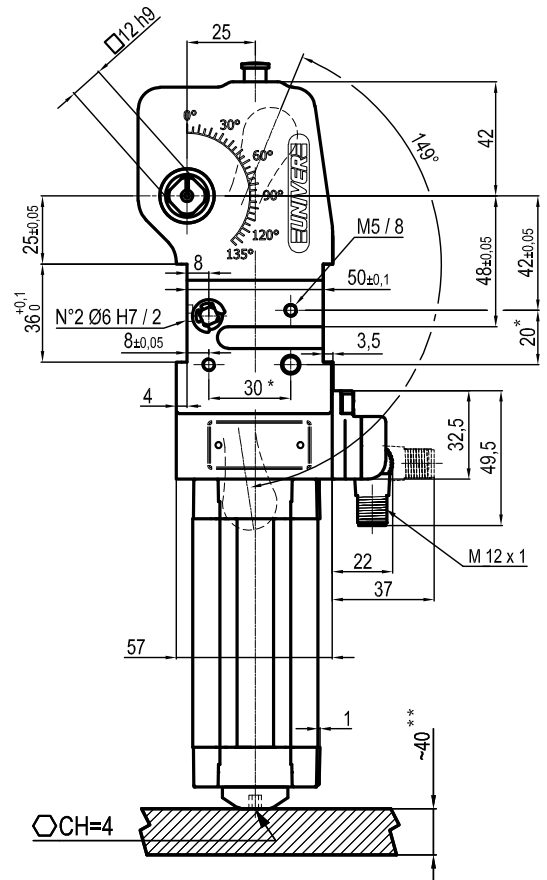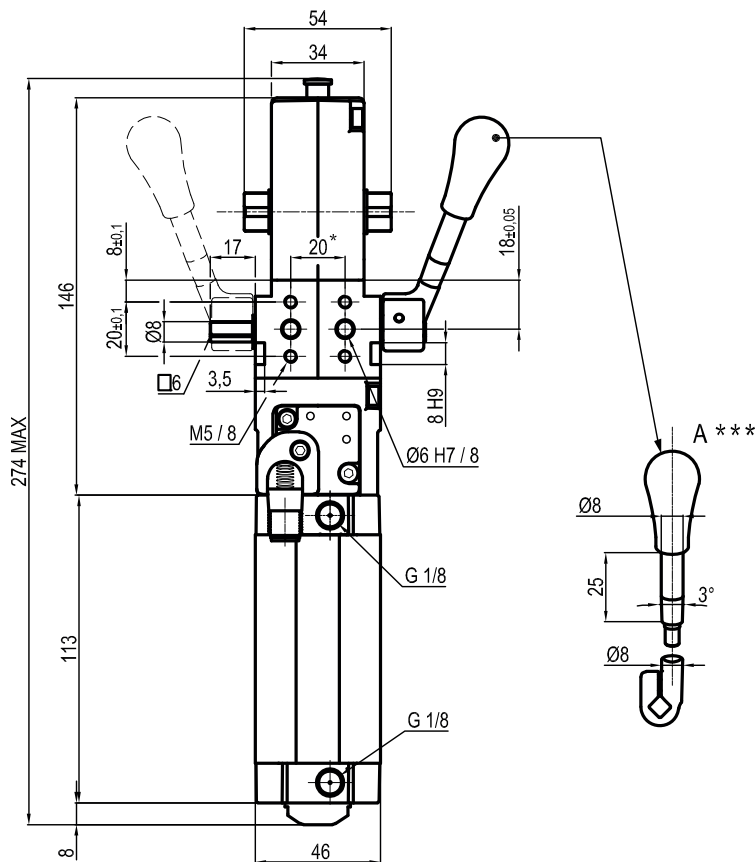

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
32 mm	250 Nm	75 Nm	1,4 Kg


* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ** : AREA TO ACCESS ANGLE ADJUSTMENT
 ** : DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

Subject to technical modifications without notice

Rev. 02 27.01.22

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable**
 Without arm
 With hand lever
 Electronic sensor with M12 swivel connector, from 0° to 90°,
 in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**

0 mm



Subject to technical modifications without notice

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable from 0° to 105°**
 Arm position: **180°**
 With hand lever
 Electronic sensor with M12 swivel connector, from 0° to 90°,
 in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**

0 mm



Subject to technical modifications without notice

Rev. 03 27.01.22

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable from 0° to 105°**
 Arm position: **90°**
 With hand lever
 Electronic sensor with M12 swivel connector, from 0° to 90°,
 in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**


10 mm



Subject to technical modifications without notice

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable from 0° to 105°**
 Arm position: **180°**
 With manual lever
 Electronic sensor with M12 swivel connector, from 0° to 90°,
 in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**

10 mm

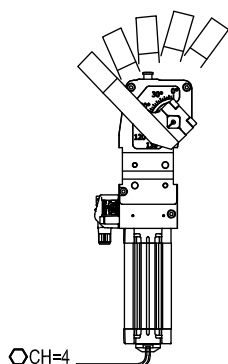


Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable from 0° to 105°**
 Arm position: **90°**
 With manual lever
 Electronic sensor with M12 swivel connector, from 0° to 90°,
 in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**

Subject to technical modifications without notice

UCBM32OE_K0

25 mm

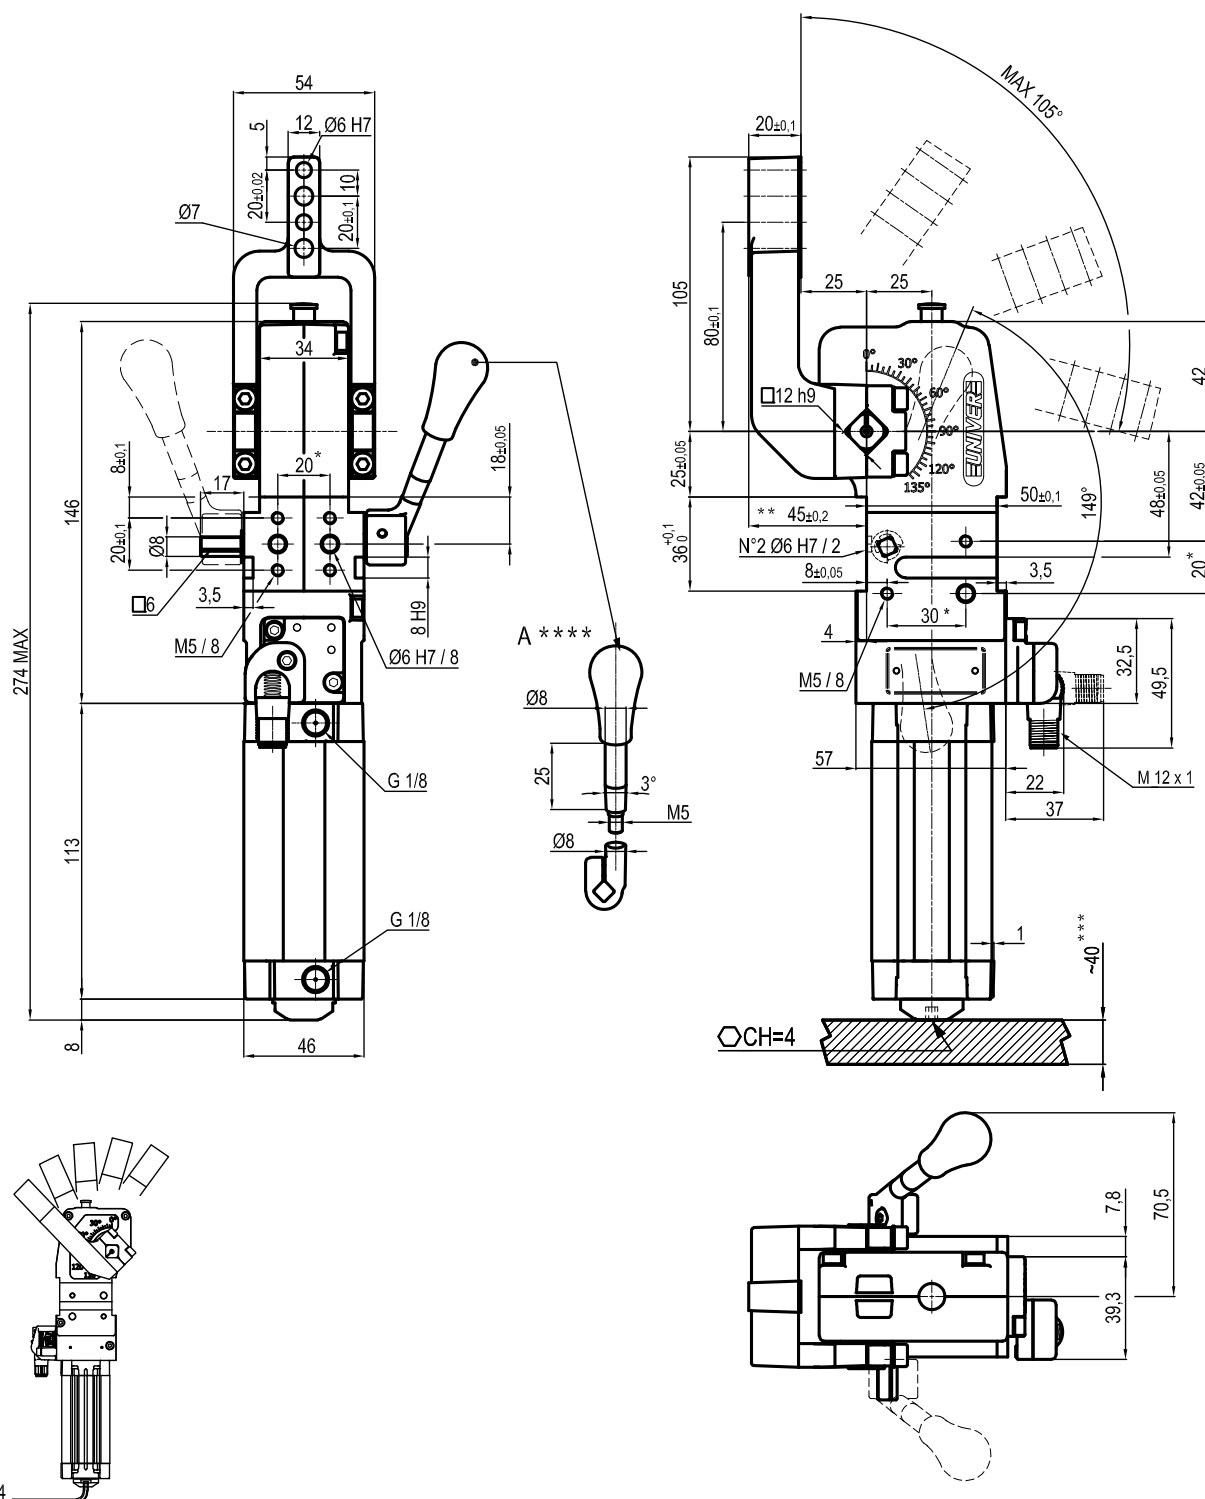

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
32 mm	250 Nm	75 Nm	1,4 Kg

*: TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

**: TOLERANCE AT 80 mm FROM PIVOT POINT

***: AREA TO ACCESS ANGLE ADJUSTMENT

****: DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

Subject to technical modifications without notice

Rev. 03 27.01.22

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 105°**

Arm position: **180°**

With manual lever

Electronic sensor with M12 swivel connector, from 0° to 90°,


in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**

UCBM32VE_K0

25 mm

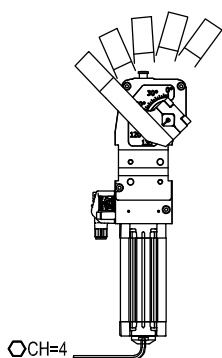

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable from 0° to 105°**
 Arm position: **90°**
 With manual lever
 Electronic sensor with M12 swivel connector, from 0° to 90°,
 in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**

Subject to technical modifications without notice