





UCBP40

Unità di bloccaggio UNICLAMP

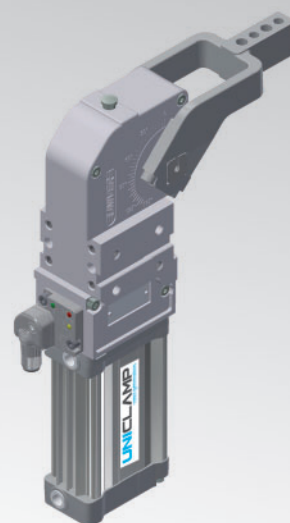





U	C	B	P	4	0	O	E	A	K	0
1	2	3	4	5	6	7	8	9		

1 Serie	2 Standard	3 Versione	4 Taglia
UC = Unità di bloccaggio UNICLAMP con regolazione continua angolo d'apertura da: 0° a 135° Max L'angolo di apertura può variare a seconda della posizione e della tipologia del pressore	B = Standard Europeo	P = Pneumatica	40 = Ø 40 mm

5 Posizione pressore	6 Tipo di pressore
V = 90° O = 180° N = Senza pressore   	B* = Centrale, 0 mm Offset I* = Destro, 0 mm Offset J* = Sinistro, 0 mm Offset C = Centrale, 15 mm Offset D = Destro, 15 mm Offset S = Sinistro, 15 mm Offset E = Centrale, 45 mm Offset F = Destro, 45 mm Offset L = Sinistro, 45 mm Offset X* = Centrale, fori spina maggiorati Ø 8 H7, 15 mm Offset Y* = Destro, fori spina maggiorati Ø 8 H7, 15 mm Offset Z* = Sinistro, fori spina maggiorati Ø 8 H7, 15 mm Offset N = Senza pressore * = Disponibili su richiesta

7 Materiale pressore	8 Sensore	9 Revisione prodotto
A = Alluminio S = Acciaio N = Senza pressore	N = Senza sensore (con piastra di chiusura) K = Sensore elettronico PNP (ottico) (DF-K) D = Pneumatic sensor J = Sensore elettronico NPN (ottico) (DF-J) Y = Sensore elettronico PNP (ottico) (DF-Y) led bianco	Assegnato da UNIVER

UCBP40NNNK0

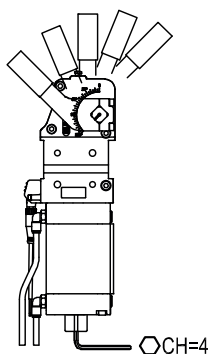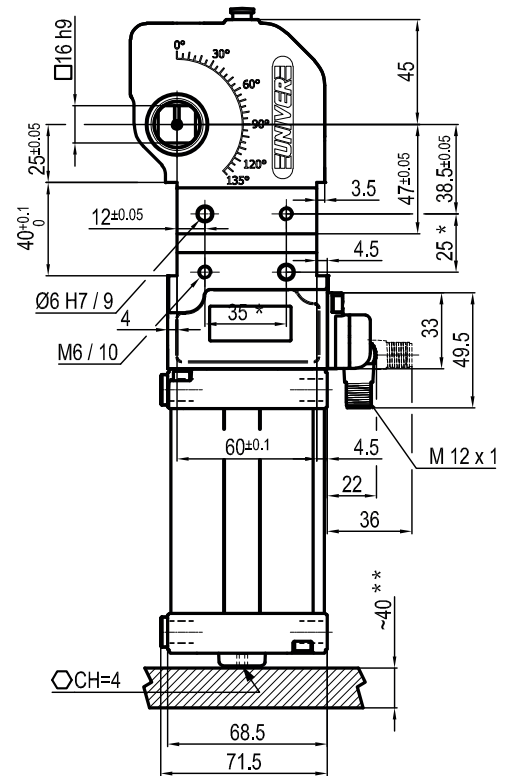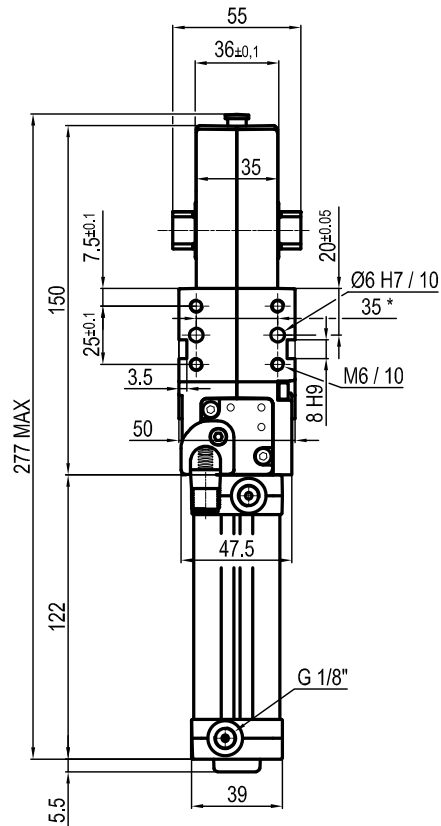

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,5 Kg

* : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

** : AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable**

Without arm

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**


Pneumatic ports on both sides

Subject to technical modifications without notice

Rev. 01 26.01.22

UCBP400__K0

0 mm

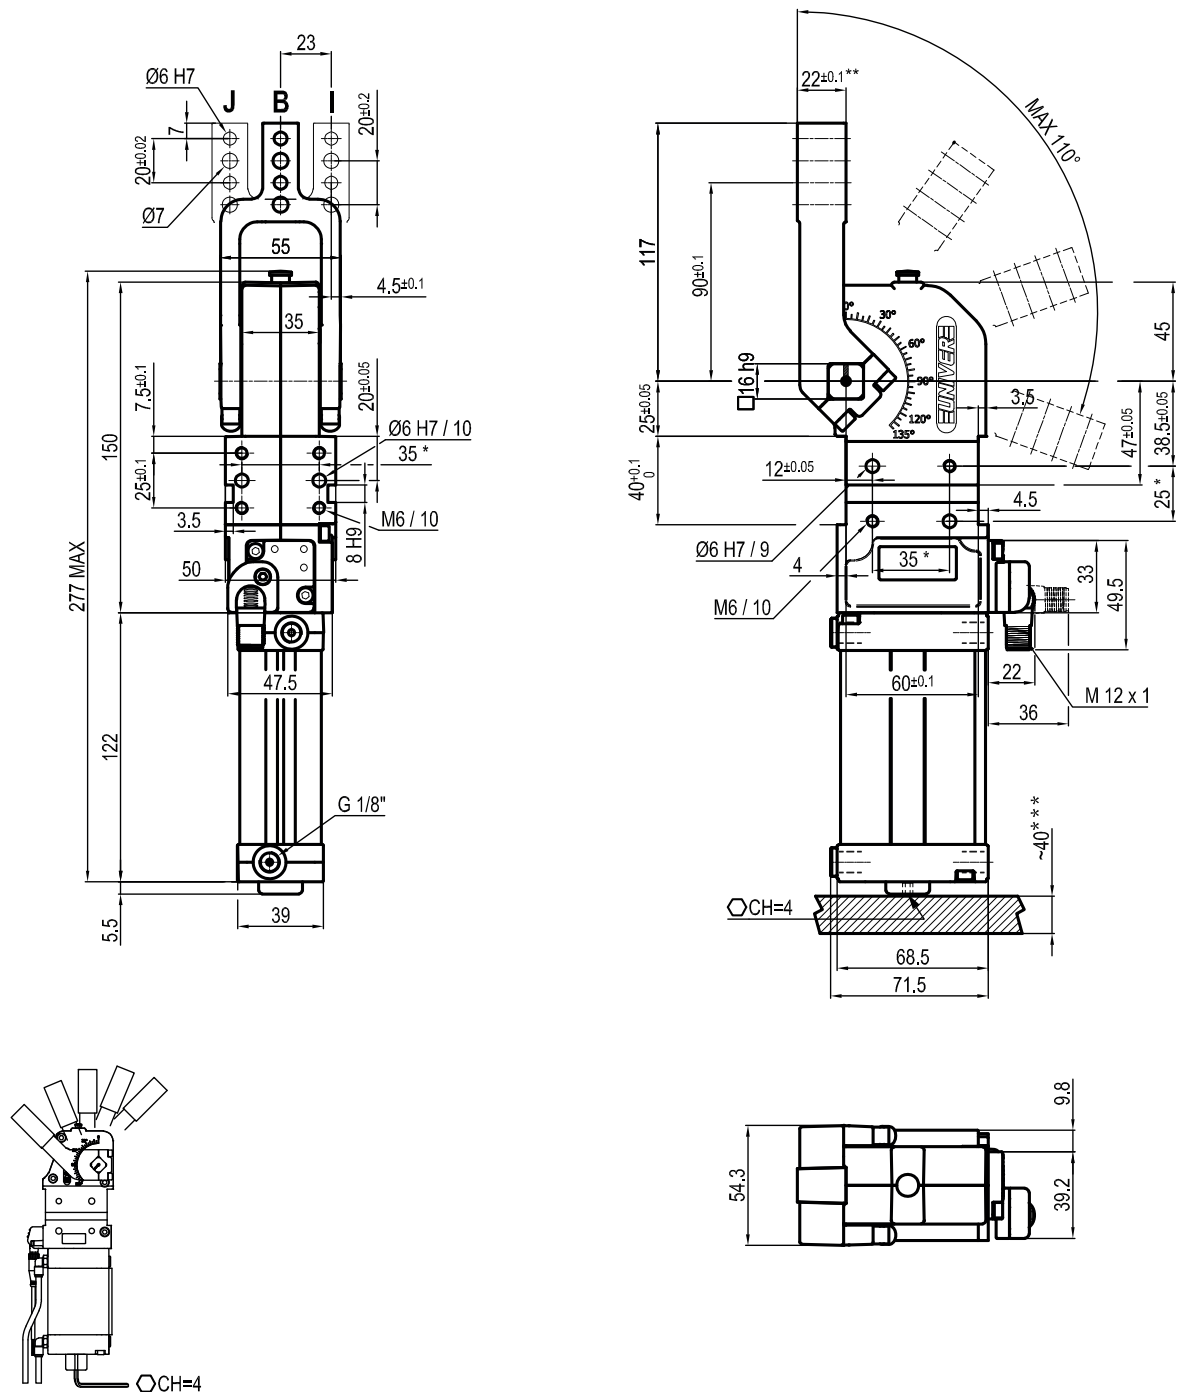

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,5 Kg

*: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**: TOLERANCE AT 80 mm FROM PIVOT POINT

***: AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 110°**

Arm position: **180°**

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**


Pneumatic ports on both sides

Subject to technical modifications without notice

Rev. 01 26.01.22

UCBP400__K0

15 mm

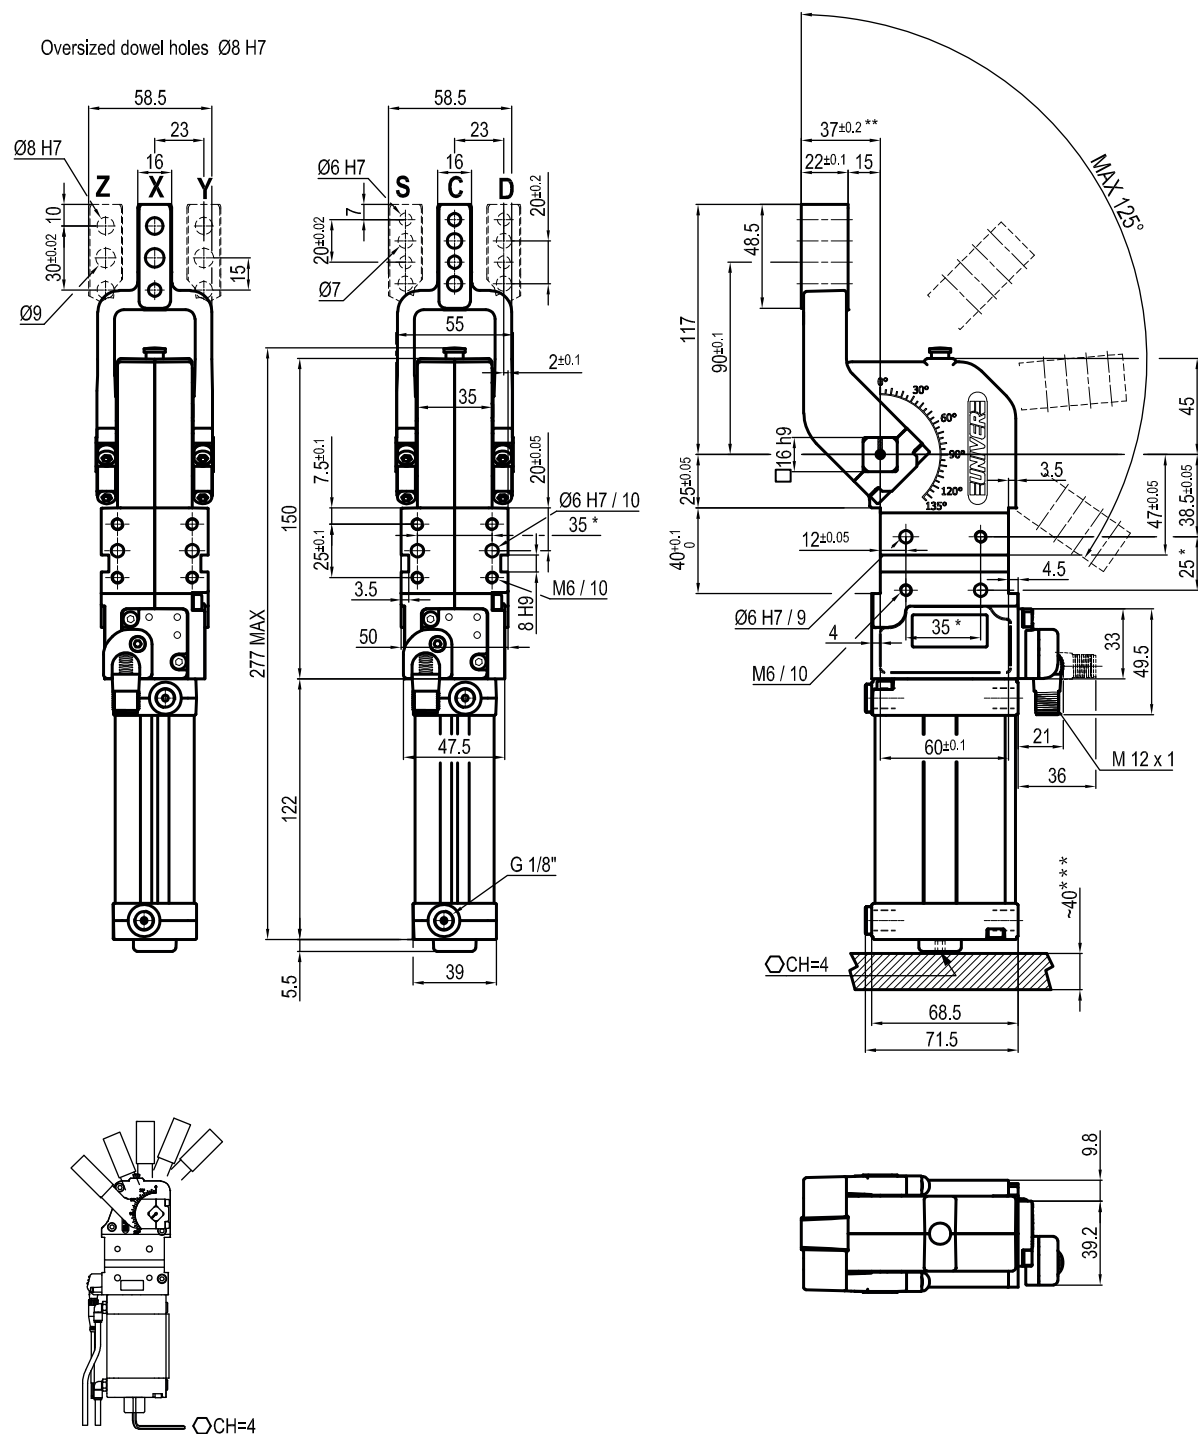

Bore $\varnothing$	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,5 Kg

*: TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

**: TOLERANCE AT 80 mm FROM PIVOT POINT

***: AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 125°**

Arm position: **180°**

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**


Pneumatic ports on both sides

Subject to technical modifications without notice

Rev. 02 26.01.22

UCBP40O__K0

45 mm

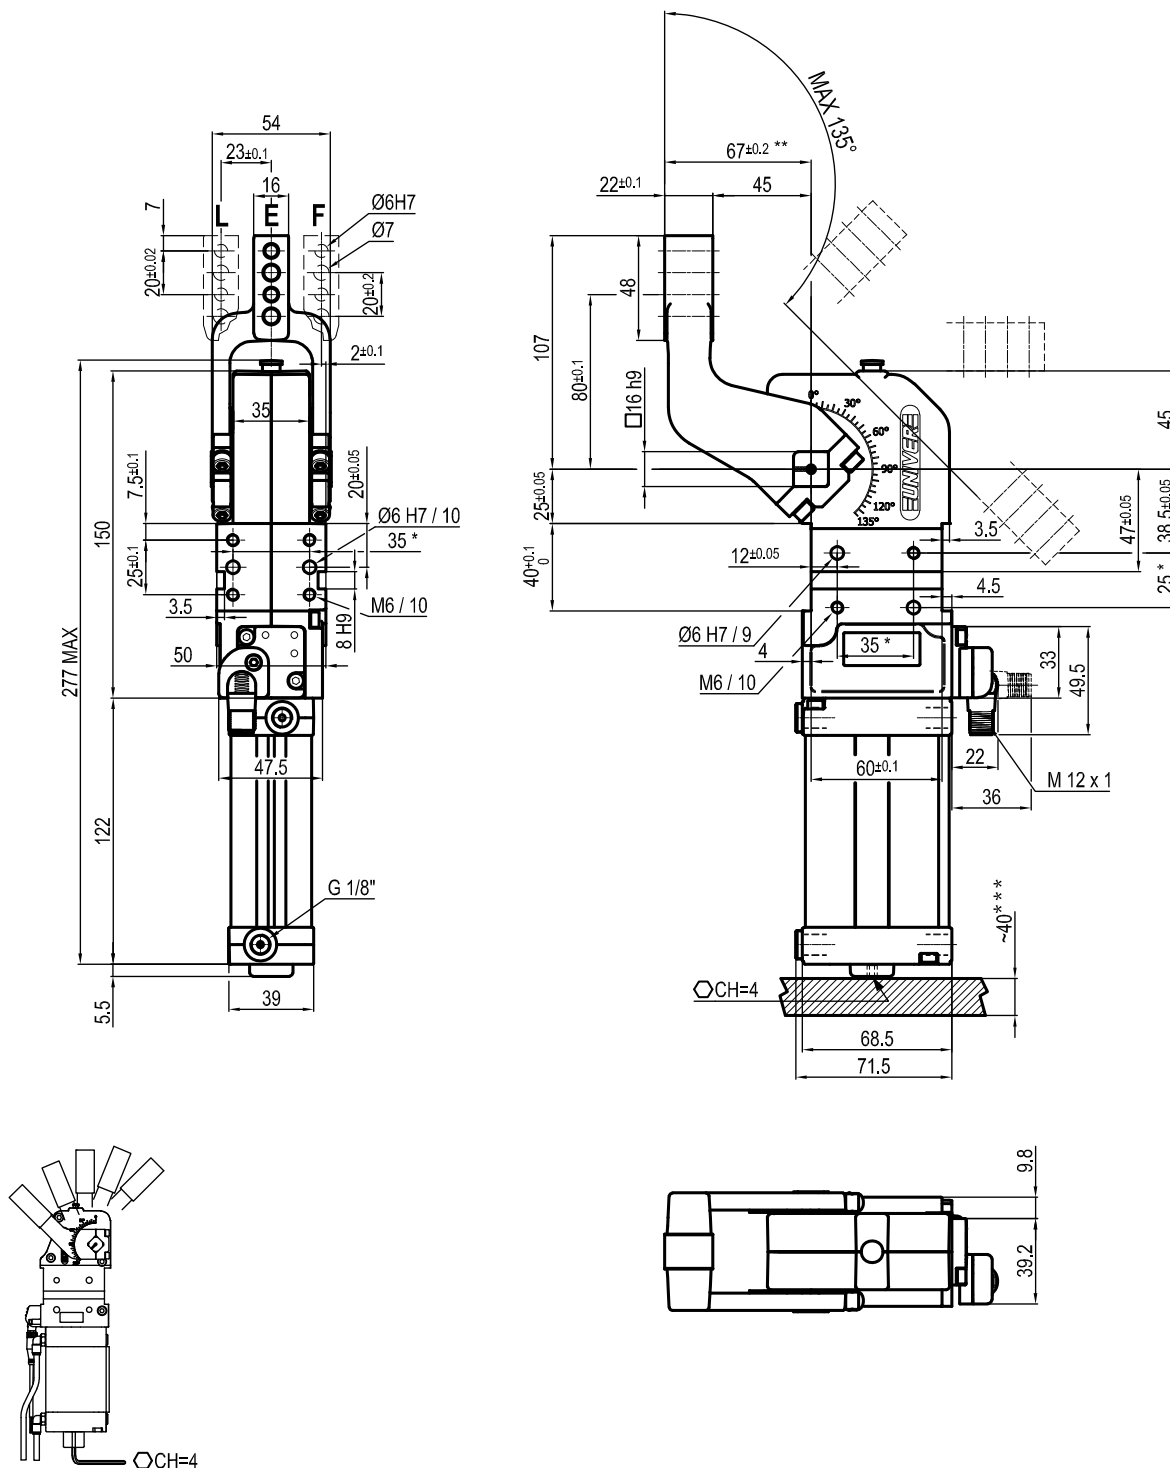

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,5 Kg

*: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**: TOLERANCE AT 80 mm FROM PIVOT POINT

***: AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 135°**

Arm position: **180°**

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**


Pneumatic ports on both sides

Subject to technical modifications without notice

Rev. 01 26.01.22

UCBP40V__K0

0 mm

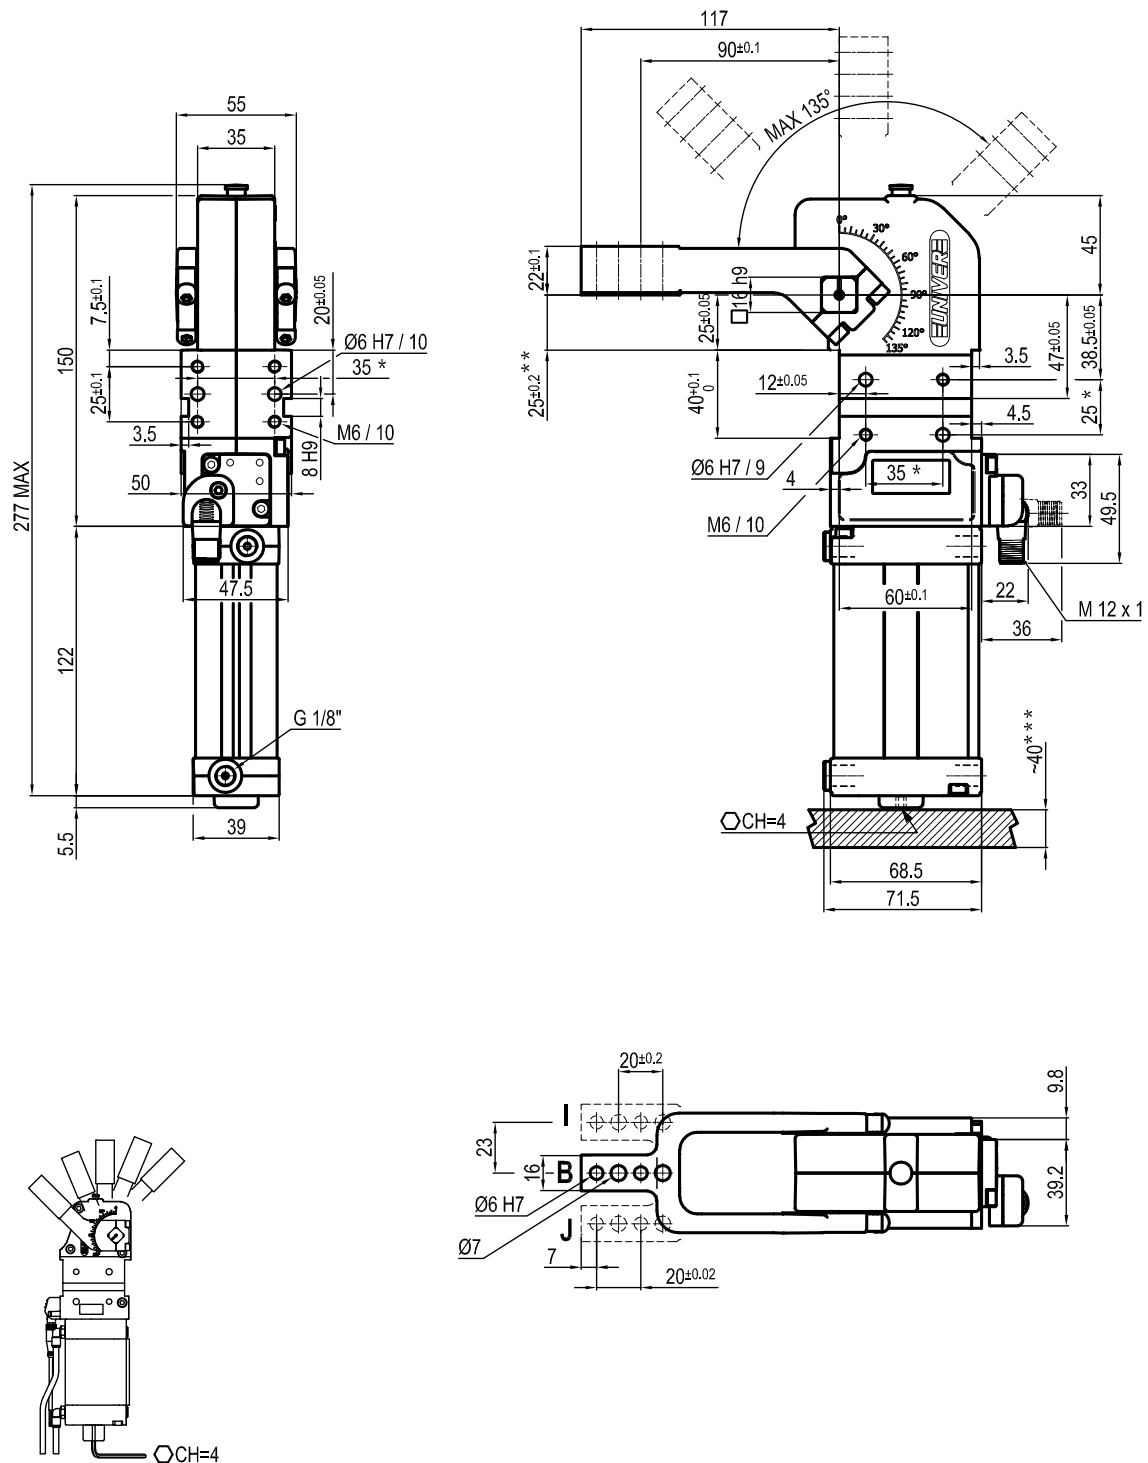

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,5 Kg

*: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**: TOLERANCE AT 80 mm FROM PIVOT POINT

***: AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 135°**

Arm position: **90°**

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**


Pneumatic ports on both sides

Subject to technical modifications without notice

Rev. 01 26.01.22

UCBP40V__K0

15 mm

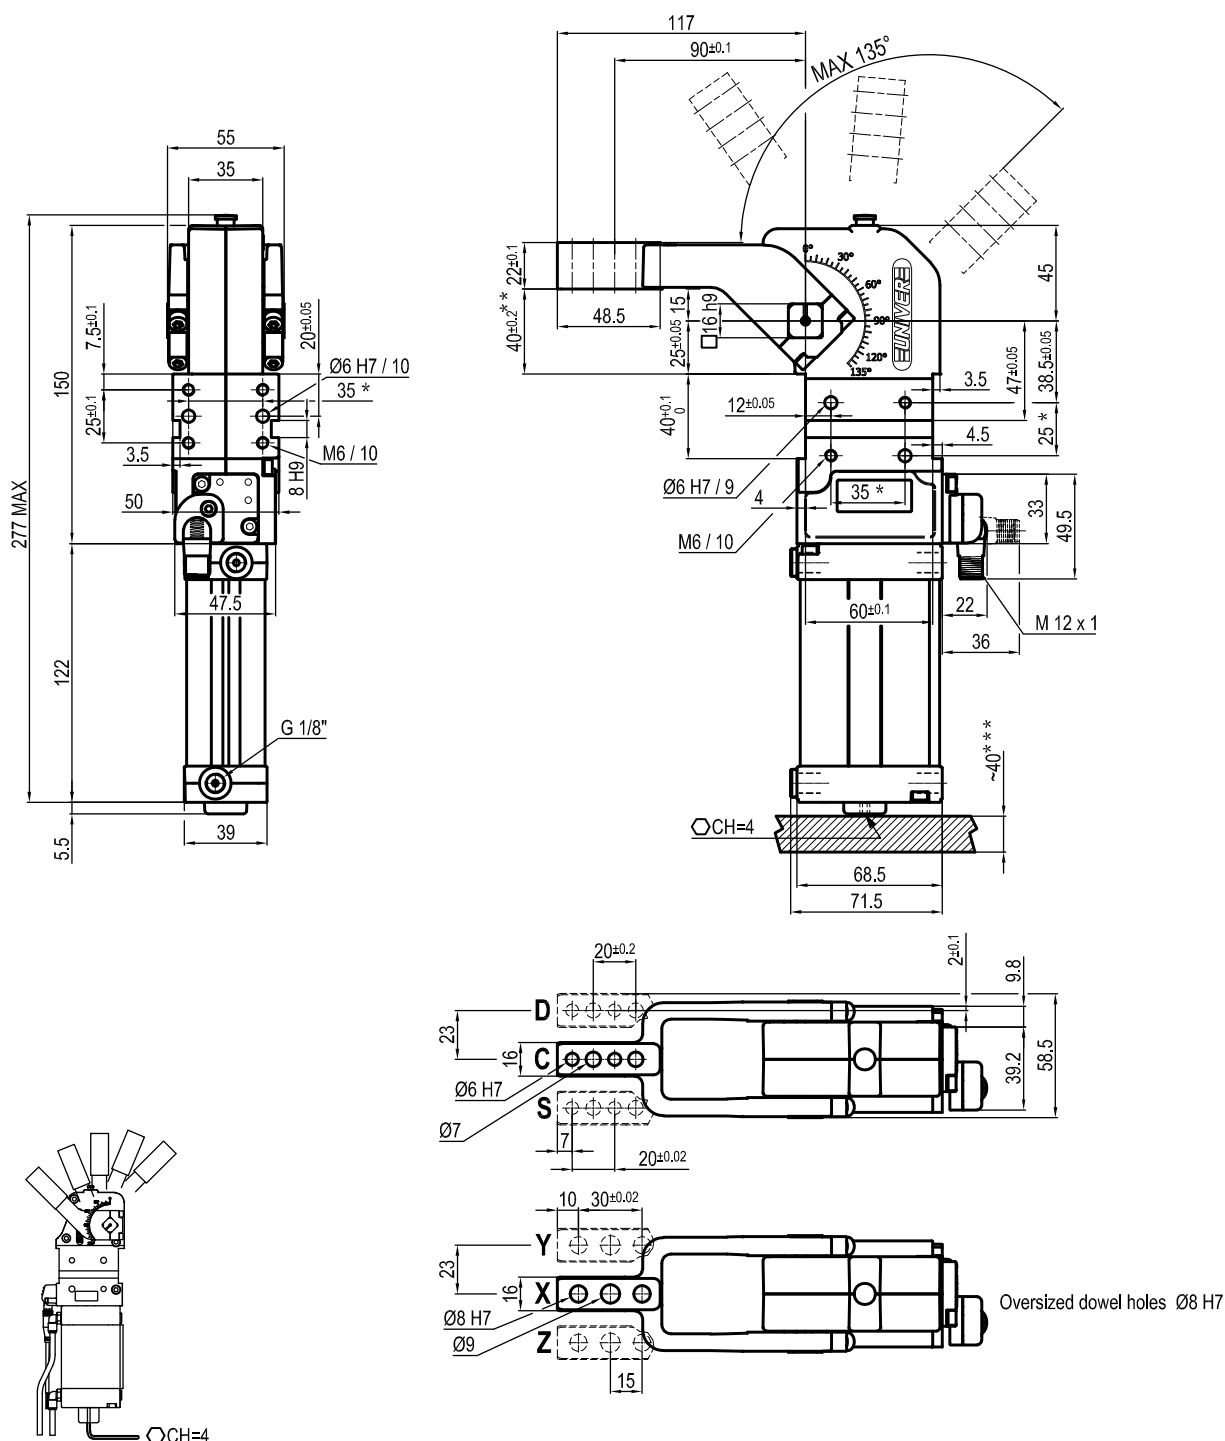

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,5 Kg

*: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**: TOLERANCE AT 80 mm FROM PIVOT POINT

***: AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 135°**

Arm position: **90°**

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**


Pneumatic ports on both sides

Subject to technical modifications without notice

Rev. 02 26.01.22

UCBP40V__K0

45 mm

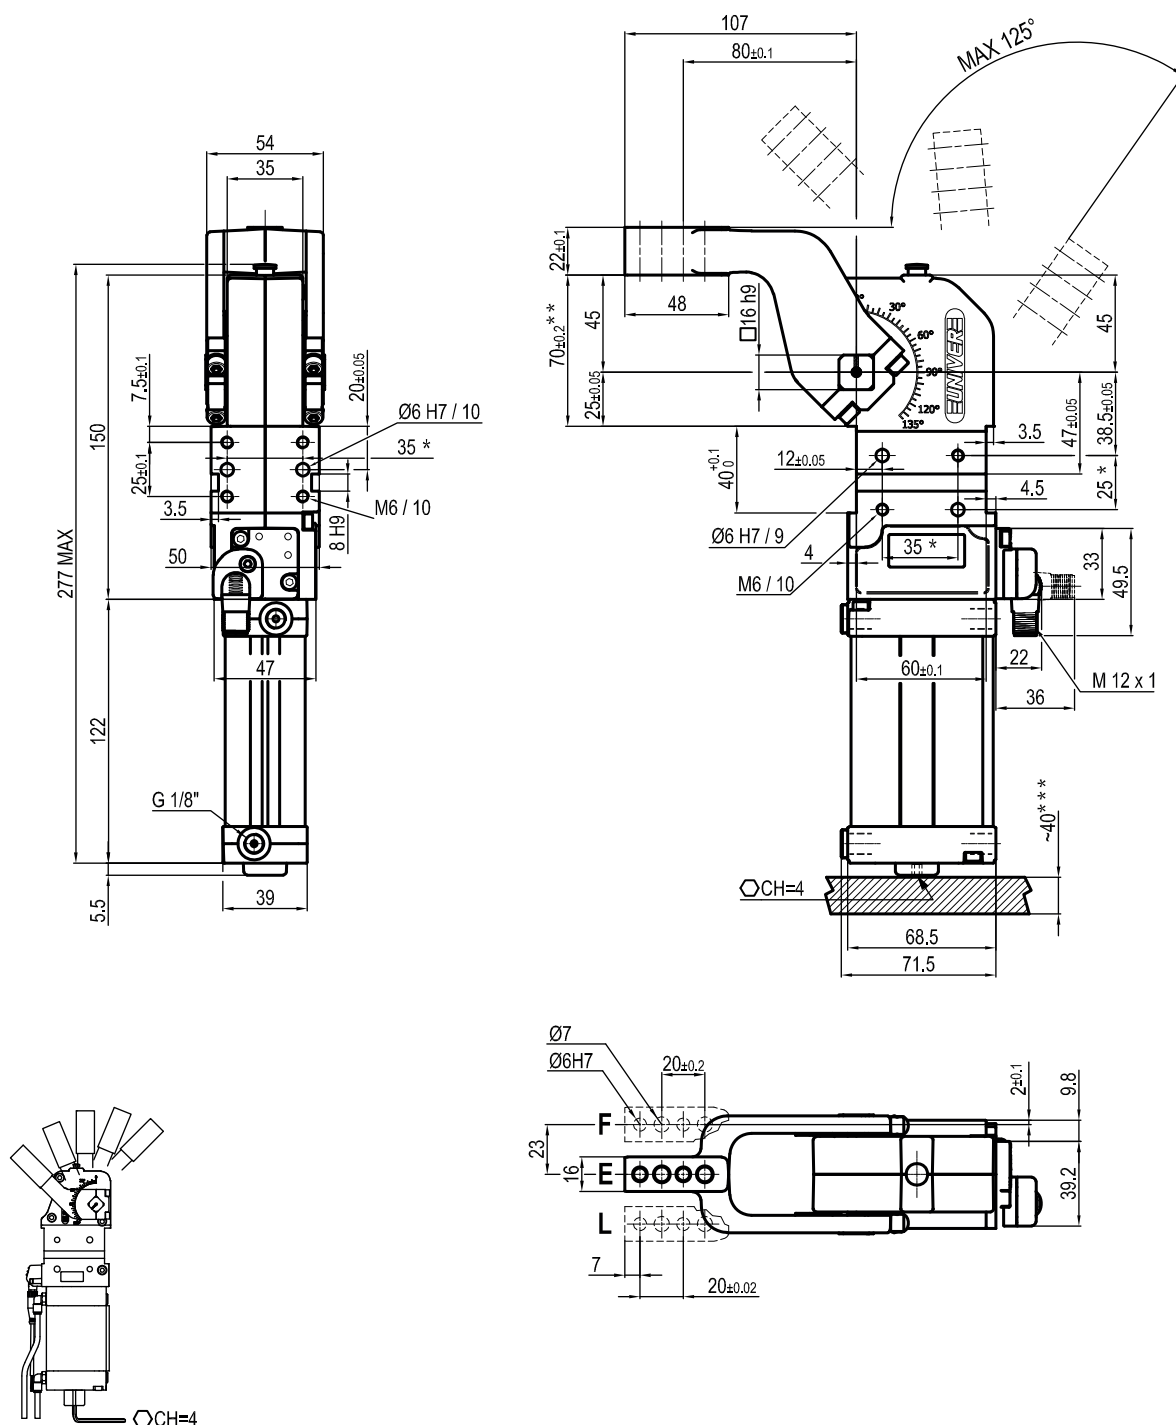

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,5 Kg

*: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**: TOLERANCE AT 80 mm FROM PIVOT POINT

***: AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 125°**

Arm position: **90°**

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**

Pneumatic ports on both sides

Subject to technical modifications without notice

Rev. 01 26.01.22