
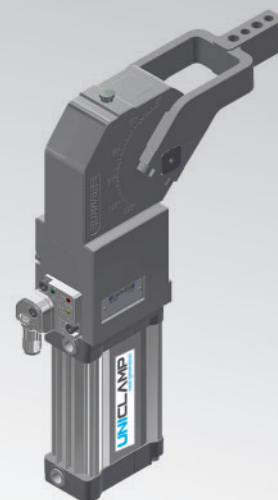




UCIP40






Unità di bloccaggio UNICLAMP



U	C	I	P	4	0	O	E	A	N	K	0
1	2	3	4	5	6	7	8	9	10		

1 Serie	2 Standard	3 Versione	4 Taglia
UC = Unità di bloccaggio UNICLAMP con regolazione continua angolo d'apertura da: 0° a 135° Max L'angolo di apertura può variare a seconda della posizione e della tipologia del pressore	I = Intercambiabile con taglie 50/63	P = Pneumatica	40 = Ø 40 mm
5 Posizione pressore	6 Tipo di pressore	7 Materiale pressore	
V = 90° O = 180° N = Senza pressore	C = Centrale, 15 mm Offset D = Destro, 15 mm Offset S = Sinistro, 15 mm Offset E = Centrale, 45 mm Offset F = Destro, 45 mm Offset L = Sinistro, 45 mm Offset N = Senza pressore	A = Alluminio S = Acciaio N = Senza pressore	
  			
8 Variante	9 Sensore	10 Revisione prodotto	
N = Standard A = Predisposta per autoritenuta	N = Senza sensore (con piastra di chiusura) K = Sensore elettronico PNP (ottico) (DF-K) D = Pneumatic sensor J = Sensore elettronico NPN (ottico) (DF-J) Y = Sensore elettronico PNP (ottico) (DF-Y) led bianco	Assegnato da UNIVER	

UCIP40NNNK0

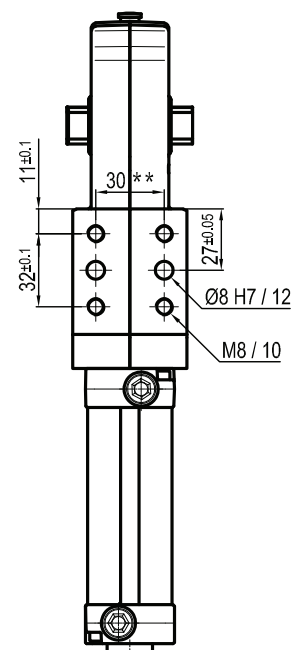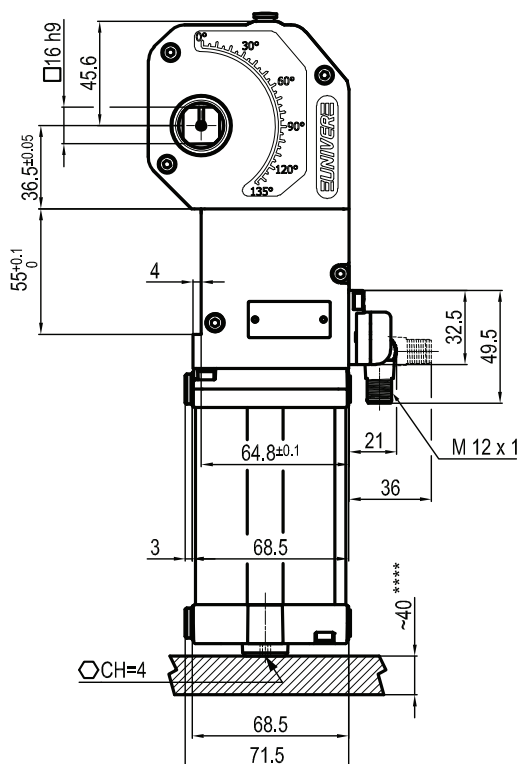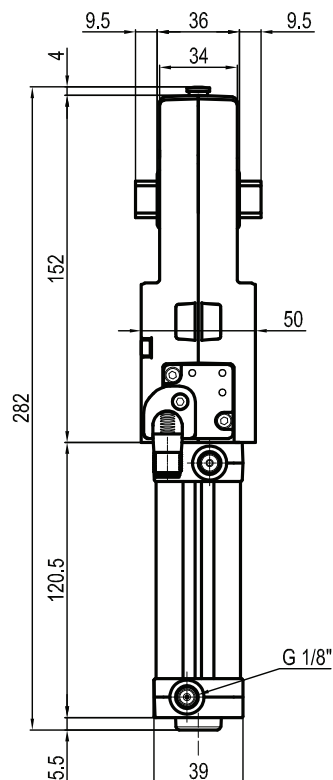

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

* : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

** : AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable**

Without arm

Electronic sensor with M12 swivel connector, from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**

Pneumatic ports on both sides

Subject to technical modifications without notice


Rev. 00 19.05.20

45 mm



Subject to technical modifications without notice

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable from 0° to 135°**
 Arm position: **180°**
 Electronic sensor with M12 swivel connector that can be
 orientated at 0° or 90°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**
 Pneumatic ports on both sides

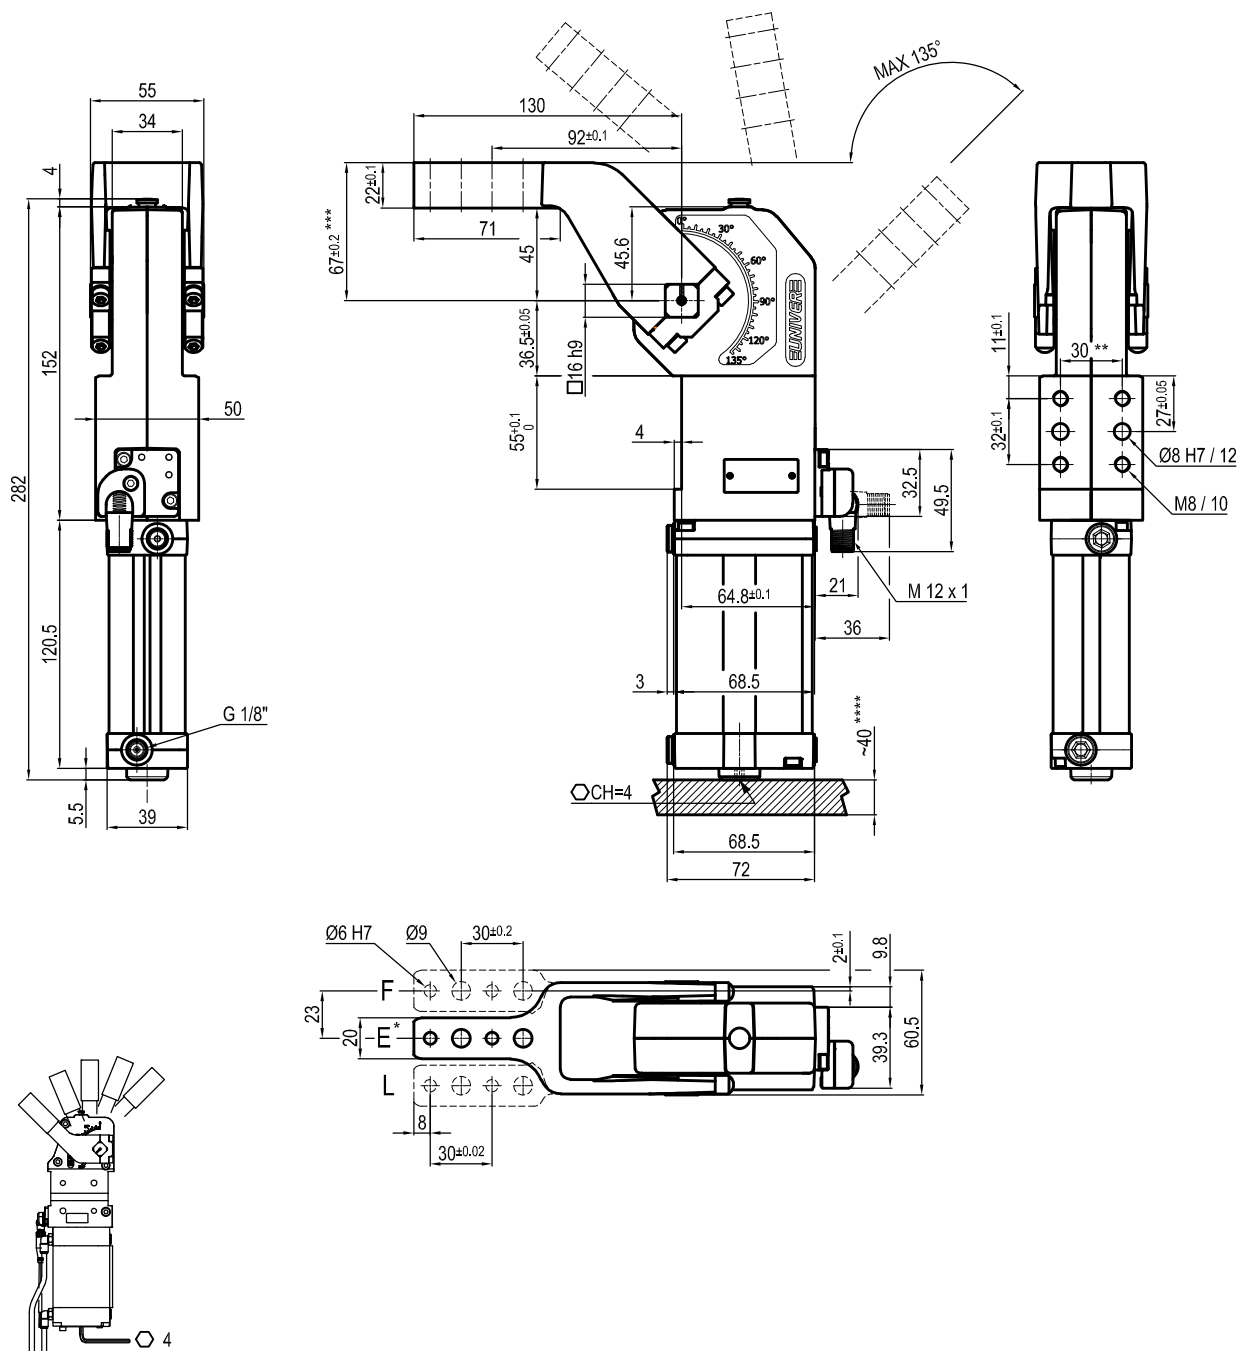

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

* : "E" CENTRAL - Ø50 / Ø63 mm SIZES COMPATIBLE

** : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

*** : TOLERANCE AT 80 mm FROM PIVOT POINT

**** : AREA TO ACCESS ANGLE ADJUSTMENT

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 135°**

Arm position: **90°**

Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**

Pneumatic ports on both sides