

USS50


Unità di bloccaggio e centraggio fori pneumatica
UNICLAMP, gancio orientabile



U	S	S	5	0	J	B	1	0	-	-	-	K	0
1	2	3	4	5	6	7	8	9	10				

1	Serie	2	Versione	3	Taglia	4	Modello
US = Unità di bloccaggio e centraggio fori UNICLAMP, con compensazione		S = Pneumatica, gancio orientabile		50 = Ø 50 mm		J = Standard R = Con sblocco/blocco meccanico	
5		Posizione gancio		6		Diametro perno	
B = Standard				1 ≤ Ø 18 mm 2 = Ø 20 mm 3 = Ø 25 mm 4 = Ø 30 mm 5 = Ø 35 mm 6 = Ø 40 mm		0 = Perno di centraggio non incluso 1 = Perno di centraggio incluso	
C = Gancio ruotato di 180°				Per altri Ø perno rivolgersi all'Ufficio Commerciale			
8		Numerazione progressiva		9		Sensore	
Numerazione progressiva per prodotto speciale a cura dell'Ufficio Commerciale				K = Sensore elettronico PNP (ottico) (DF-K) N = Senza sensore (con piastra di chiusura)		Assegnato da UNIVER	
				10		Revisione prodotto	

USS50J__0__K0

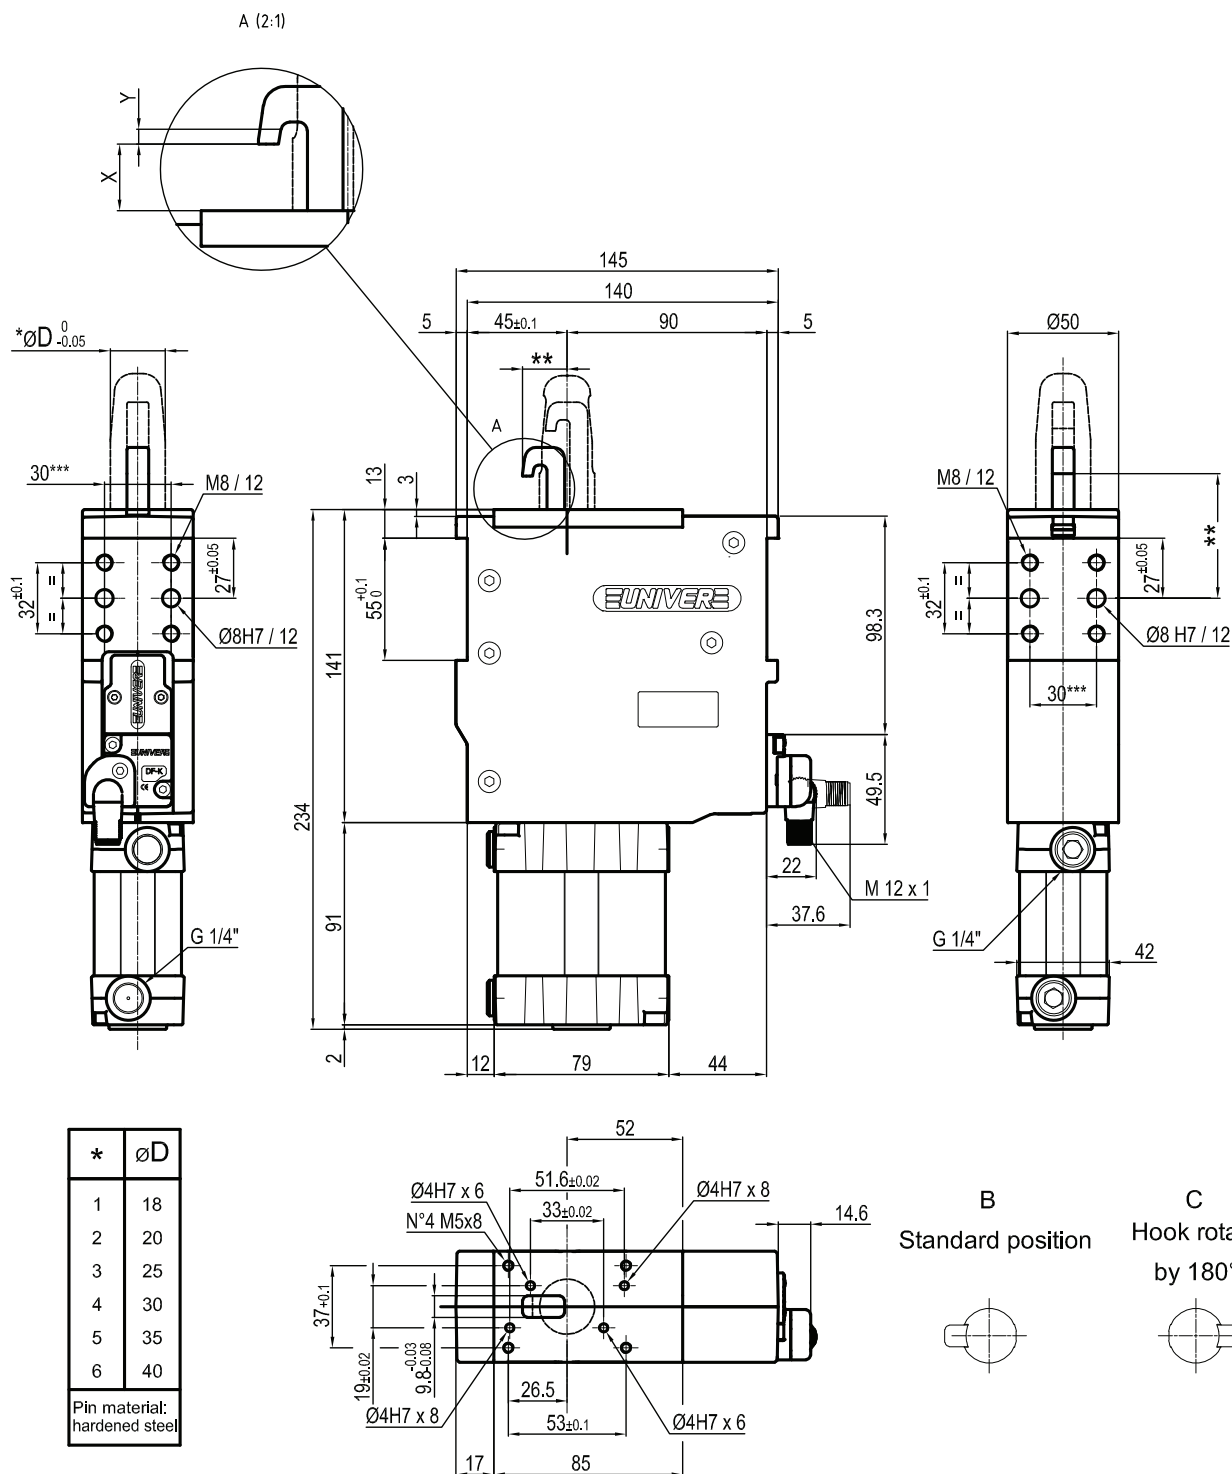

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
50 mm	3500 N	2,9 Kg

** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS

*** : TOLERANCE BETWEEN DOWEL HOLES ± 0,02, BETWEEN SCREW HOLES ± 0,1

X= metal sheet

Y = clamping range (X + 2,3 mm Max)

Subject to technical modifications without notice

Rev. 00 20.05.20

Min./Max. operating pressure: 0,4 / 0,6 MPa

Operating temperature: 5° ÷ 45° C


Electronic sensor with M12 swivel connector,

from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc



IP code: IP 65

USS50J__1__K0

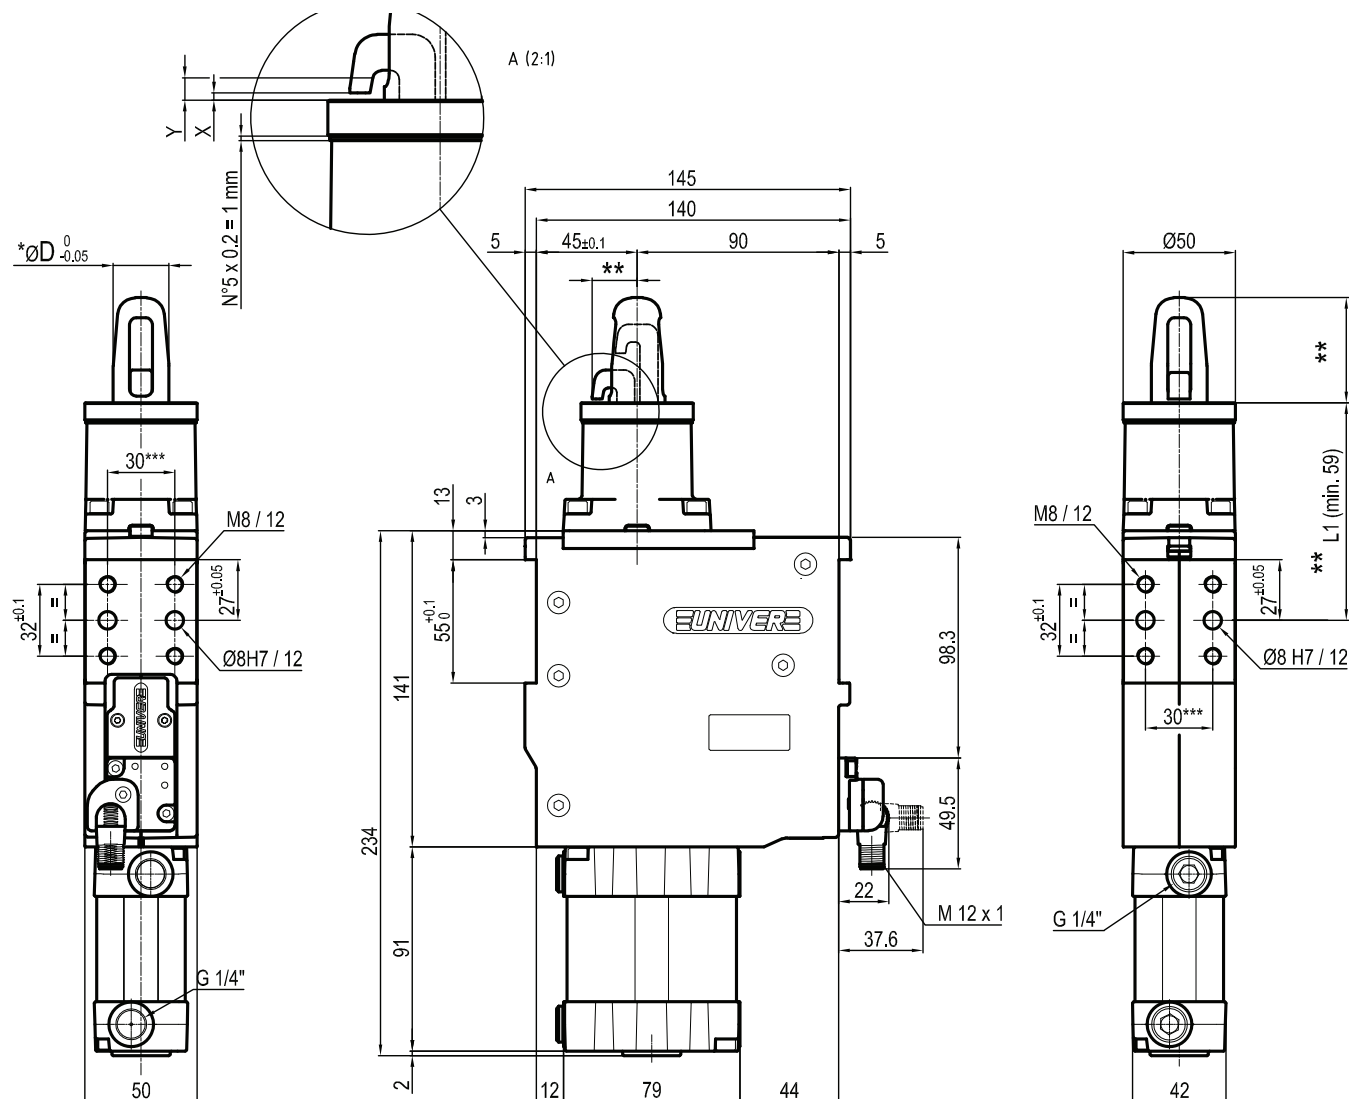

*	ØD
1	18
2	20
3	25
4	30
5	35
6	40

Pin material:
hardened steel

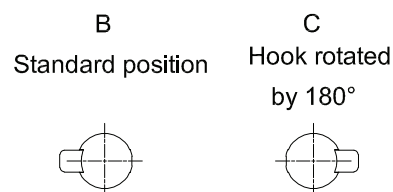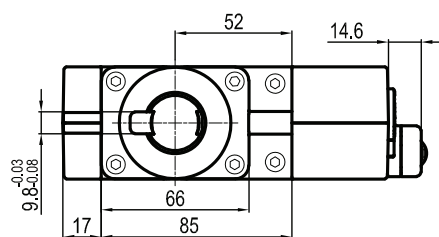

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
50 mm	3500 N	2,9 Kg

** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS

*** : TOLERANCE BETWEEN DOWEL HOLES $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

X= metal sheet

Y = clamping range (X + 2,3 mm Max)

Subject to technical modifications without notice

Rev. 01 16.10.20

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Electronic sensor with M12 swivel connector,

from 0° to 90°, in steps of 10°

Supply voltage: 10 ÷ 30 Vdc

IP code: **IP 65**