

USS63

Unità di bloccaggio e centraggio fori pneumatica HC
UNICLAMP, gancio orientabile




U	S	S	6	3	J	B	1	0	-	-	-	K	0
1	2	3	4	5	6	7	8	9	10				

1 Serie	2 Versione	3 Taglia	4 Modello
US = Unità di bloccaggio e centraggio fori UNICLAMP, con compensazione	S = Pneumatica, gancio orientabile	63 = Ø 63 mm	J = Standard R = Con sblocco/blocco meccanico
5 Posizione gancio	6 Diametro perno	7 Presenza perno di centraggio	8 Numerazione progressiva
B = Standard  C = Gancio ruotato di 180° 	1 ≤ Ø 18 mm 2 = Ø 20 mm 3 = Ø 25 mm 4 = Ø 30 mm 5 = Ø 35 mm 6 = Ø 40 mm Per altri Ø perno rivolgersi all'Ufficio Commerciale	0 = Perno di centraggio non incluso 1 = Perno di centraggio incluso	Numerazione progressiva per prodotto speciale a cura dell'Ufficio Commerciale
9 Sensore	10 Revisione prodotto		
K = Sensore elettronico PNP (ottico) (DF-K) N = Senza sensore (con piastra di chiusura)	Assegnato da UNIVER		

HC= High Compensation

USS63J__0__K0

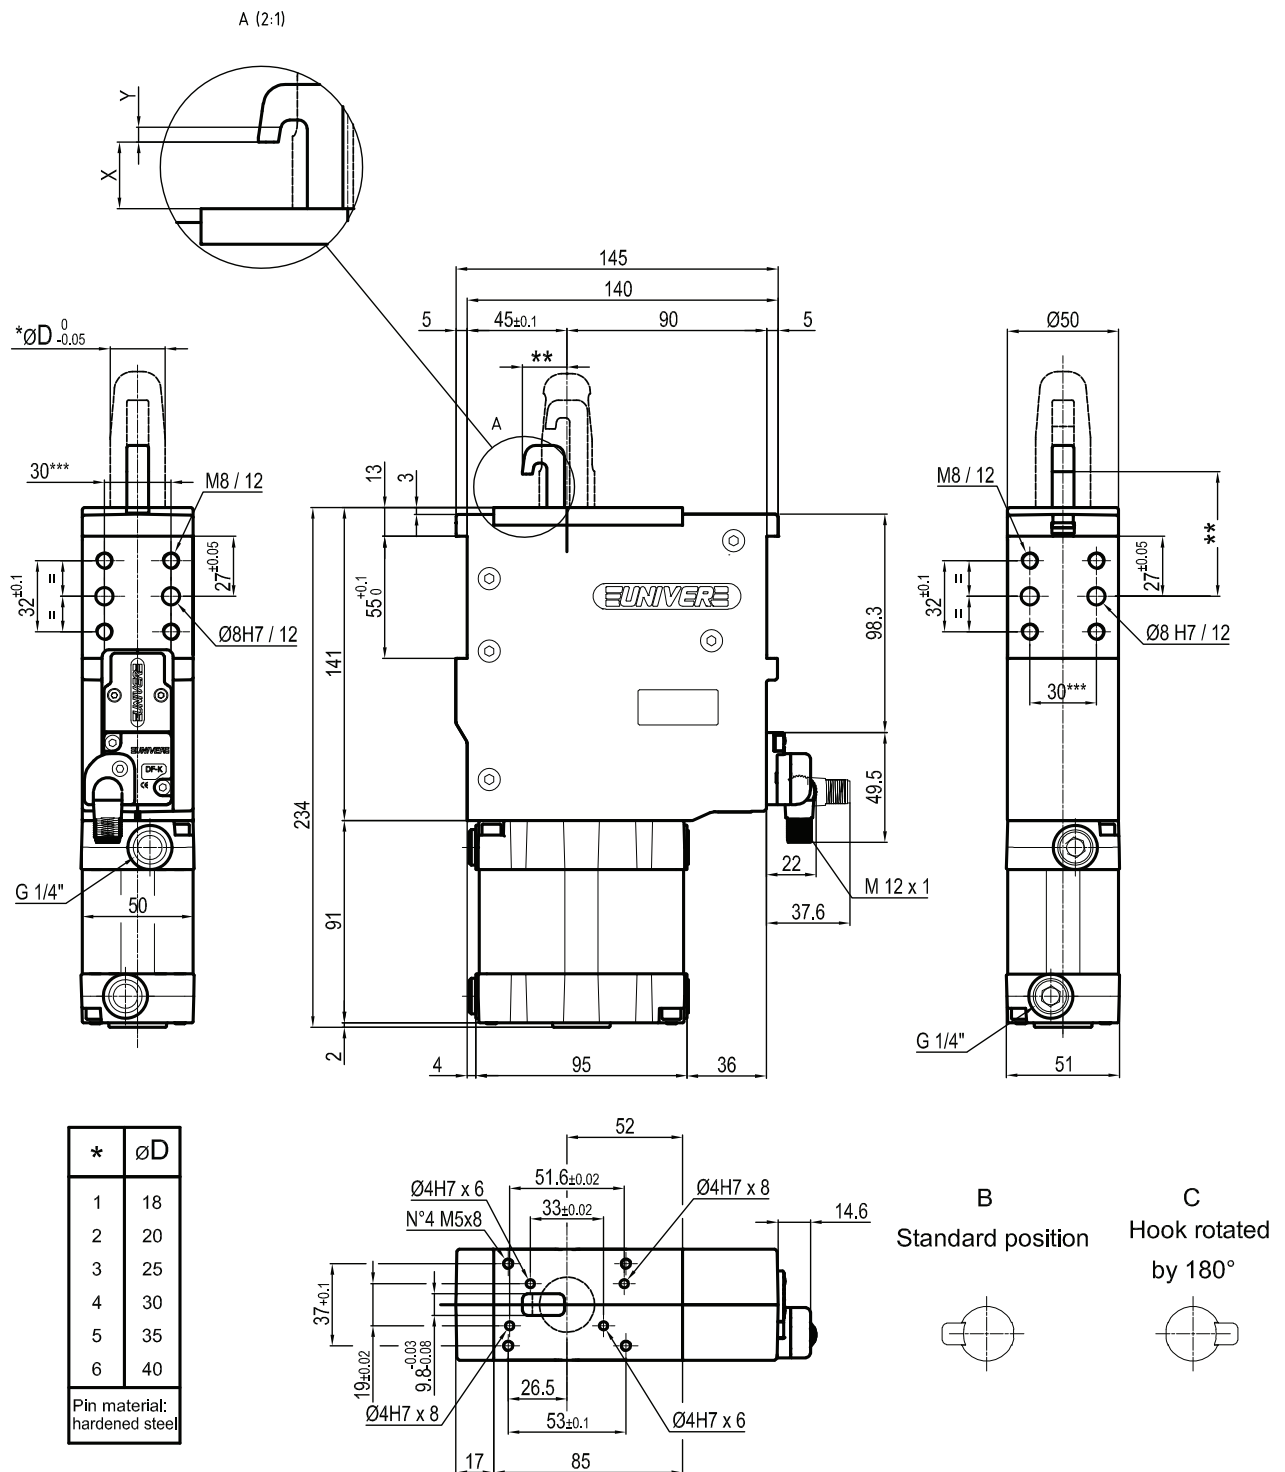

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
63 mm	3500 N	3,1 Kg

** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS
*** : TOLERANCE BETWEEN DOWEL HOLES $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$



X = metal sheet

Y = clamping range (X + 6 mm Max)

Subject to technical modifications without notice

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Electronic sensor with M12 swivel connector,
 from 0° to 90°, in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**

USS63J__1__K0

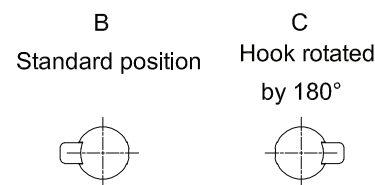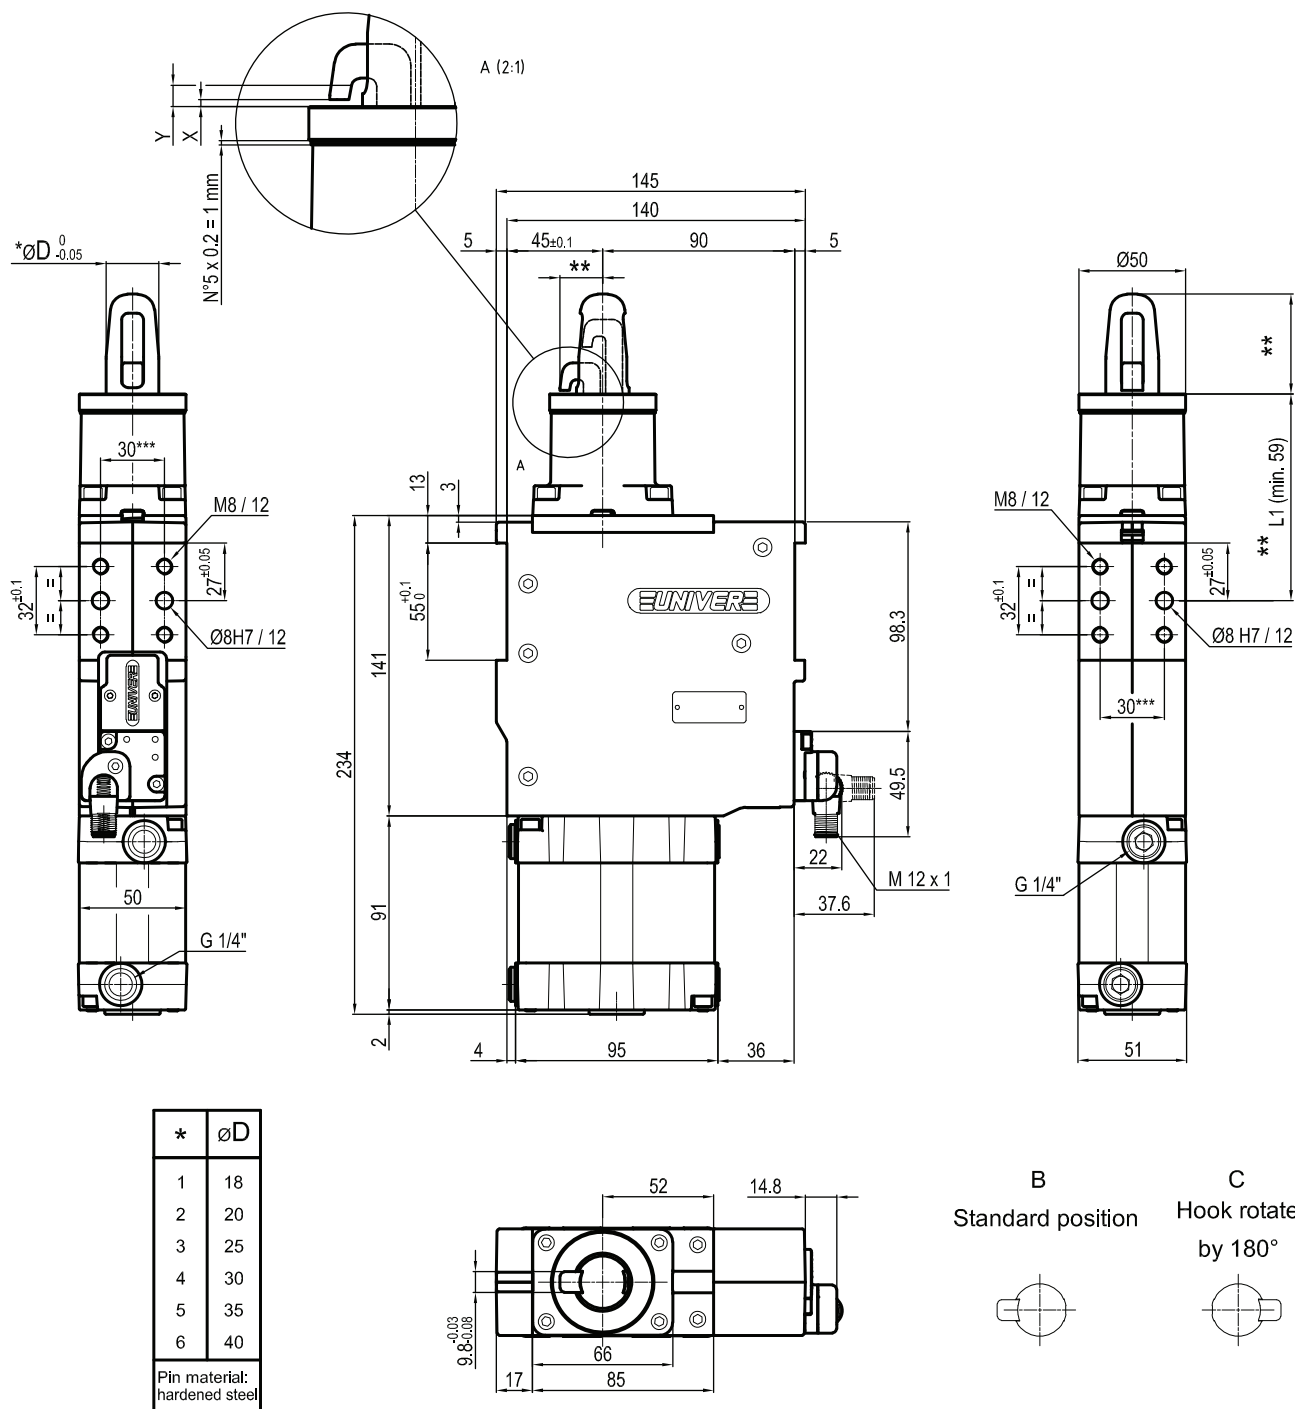

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
63 mm	3500 N	3,1 Kg

** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS

*** : TOLERANCE BETWEEN DOWEL HOLES $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

X = metal sheet

Y = clamping range (X + 6 mm Max)

Subject to technical modifications without notice

Rev. 01 16.10.20

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Electronic sensor with M12 swivel connector,
 from 0° to 90°, in steps of 10°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**