


# UAGP 155

Pneumatic power pivot 120 Nm without brake

Pneumatic power pivot without brake typically used to rotate and dump fixtures and parts in a desired position.

- High repeatability
- Mechanical stops
- Integrated flow control system
- Double pneumatic cushioning
- Fixing ports on 4 sides
- Tapered roller bearings to support heavy load
- Orientable table in 4 pre-set positions
- Version with brake available

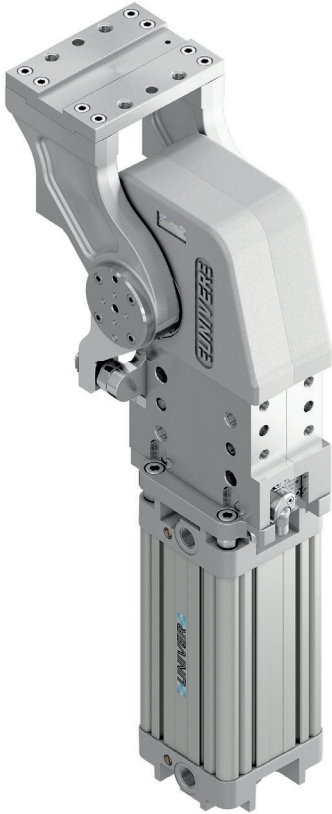

5

## CHARACTERISTICS

Operating temperature	5° ÷ 45° C
Min./Max. Operating pressure	0,4 / 0,6 MPa
Bore Ø	100 mm
Pivot rotation	45°/60°/90°/120°
Holding moment	6000 Nm
Max. torque at rotary table (0,55MPa)	120 Nm
Weight	23 Kg
Pneumatic supply ports	G1/2
Sensor	electronic (optical)
Supply voltage	10 ÷ 30 Vdc
IP code	IP 65

## CODIFICATION KEY



OPTICAL SENSOR



FLOW CONTROL SYSTEM




HIGH REPEATABILITY

- 1** SERIES  
UAG = UNICLAMP Power pivot
- 2** VERSION  
P = Pneumatic
- 3** SIZE  
155 = 120 Nm Ø 100 mm
- 4** TABLE POSITION  
O = Horizontal 90°  
P = Horizontal mirror of "O"  
V = Vertical 180°  
Z = Vertical mirror of "V"  
\*Max opening angle 60°
- 5** SENSOR  
N = No sensor (with protection plate)  
K = Electronic sensor PNP, M12 (DF-K)  
Y = Electronic sensor PNP, M12 (DF-Y) white LED  
J = Electronic sensor NPN, M12 (DF-J)

- 6** PIVOT ROTATION  
120 = 120°  
090 = 90°  
060 = 60°  
045 = 45°

- 7** BRAKE SYSTEM  
W = Without brake




- 8** CONNECTIONS  
S = Left side (Standard)  
D = Right side  
F = Front side  
P = Rear side



- 9** PRODUCT REVISION  
Assigned by UNIVER

- 10** ATEX  
X = ATEX option  
See ATEX Catalogue for types and versions

Horizontal 90°

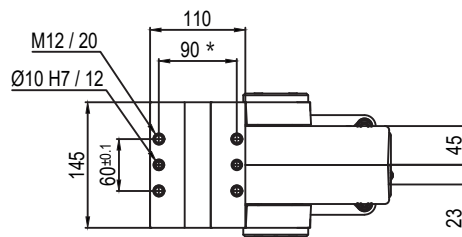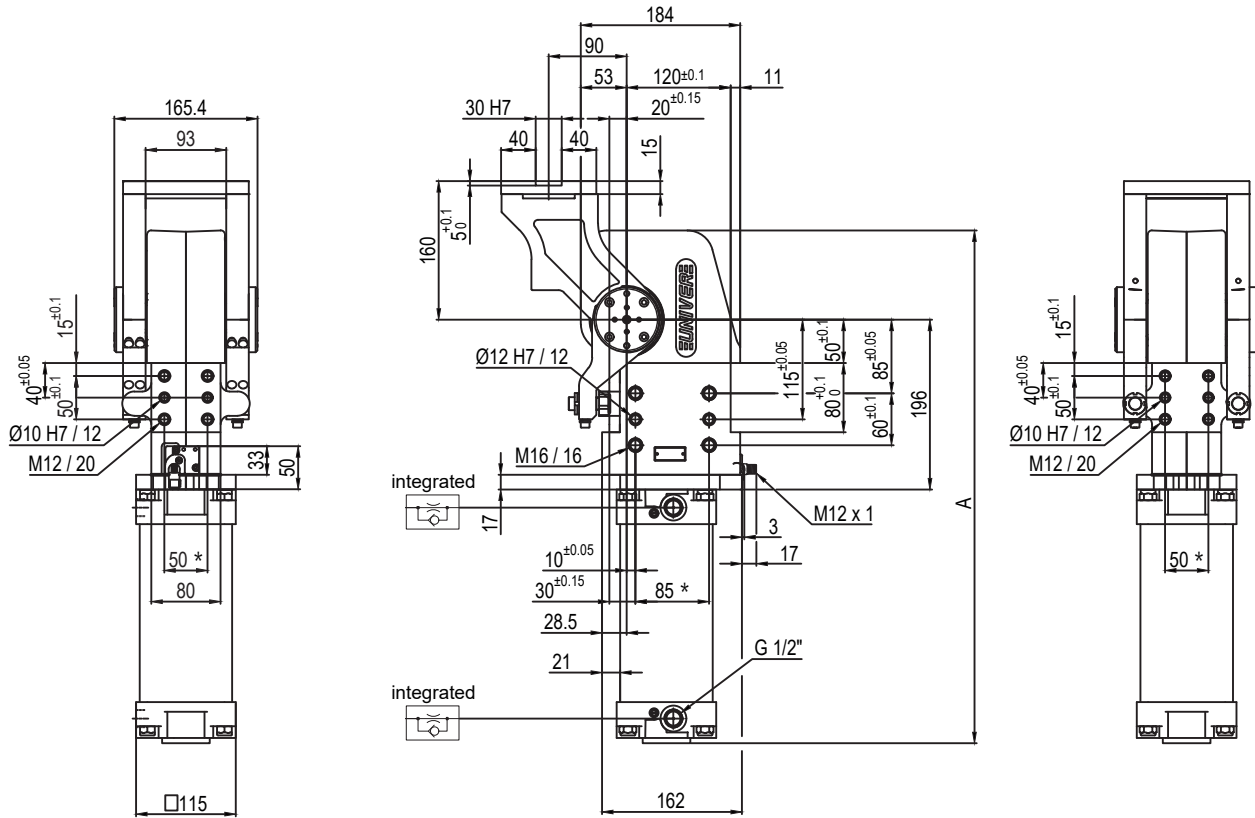

Pivot rotation (°)	A
45°	514.5
60°	528
90°	559
120°	593.5

\*TOLERANCE BETWEEN DOWELS ± 0,02 BETWEEN SCREW HOLES ± 0,1


Sensors



Electronic (optical)


- DF-K PNP M12
- DF-J NPN M12
- DF-Y PNP M12 White LED

**P** Horizontal  
Mirror of "O" position

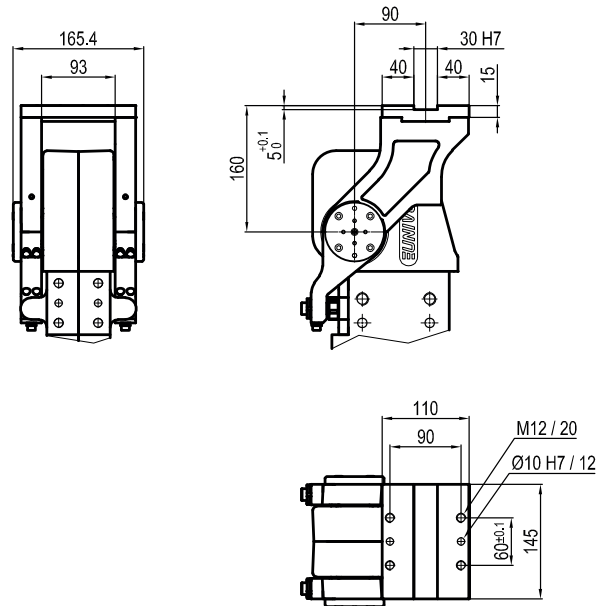

**5**

**V** Vertical 180°

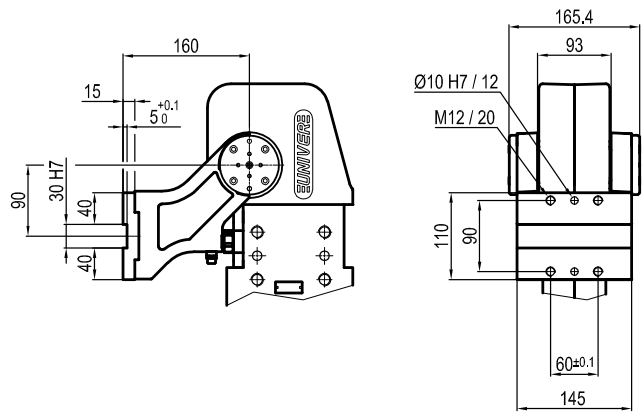

**Z** Vertical  
Mirror of "V" position

