

HGC

Raccordi a calzamento

I raccordi a calzamento sono particolarmente adatti negli assemblaggi di tubi "plastici" in impianti pneumatici, in particolar modo dove possano esserci vibrazioni o condizioni climatiche estreme (che comportano nel tempo mutamenti alle caratteristiche del tubo). L'aggancio del tubo al raccordo avviene infatti attraverso il serraggio di una ghiera che lo rende sicuro e affidabile nel tempo.




CARATTERISTICHE TECNICHE

Temperatura	-15 ÷ 80 °C
Fluido	aria compressa, vuoto, liquidi
Pressione Max	16 bar
Pressione di lavoro	-0,99 ÷ 10 bar
Applicazioni	circuiti pneumatici
Tubi di collegamento consigliati	poliammide PA 10.12, poliuretano Sh.A98 co-poliuretano Sh.55D

CARATTERISTICHE COSTRUTTIVE


Corpo	ottone nichelato
Dado	ottone nichelato
Guarnizione	NBR

HGC03 Diritto maschio conico




Codice	Ø	F	P	L	CH	CH1
HGC030418	4/2	R1/8	8,0	25,5	12	9
HGC030518	5/3	R1/8	8,0	26,0	12	9
HGC030618	6/4	R1/8	8,0	27,0	12	12
HGC030818	3/6	R1/8	8,0	28,0	12	14
HGC031018	10/8	R1/8	8,0	30,0	14	16
HGC030614	6/4	R1/4	11,0	31,0	14	12
HGC030814	8/6	R1/4	11,0	32,0	14	14
HGC031014	10/8	R1/4	11,0	33,0	14	16
HGC030638	6/4	R3/8	11,0	32,0	17	12
HGC030838	8/6	R3/8	11,0	33,0	17	14
HGC031038	10/8	R3/8	11,0	34,0	17	16
HGC031238	12/10	R3/8	11,0	36,5	17	19
HGC030812	8/6	R1/2	14,0	38,0	22	14
HGC031012	10/8	R1/2	14,0	38,0	22	16
HGC031212	12/10	R1/2	14,0	38,0	22	19
HGC031512	15/12,5	R1/2	14,0	41,0	22	24

HGC04 Diritto maschio cilindrico con OR




Codice	Ø	F	P	L	CH	CH1
HGC0404M5	4/2,7	M5	4,0	20,0	8	9
HGC0405M5	5/3	M5	4,0	20,5	8	9
HGC0406M5	6/4	M5	4,0	21,5	8	9
HGC040418	4/2,7	G1/8	6,0	23,5	14	9
HGC040618	6/4	G1/8	6,0	25,0	14	12
HGC040818	8/6	G1/8	6,0	26,0	14	14
HGC041018	10/8	G1/8	6,0	27,5	14	16
HGC040614	6/4	G1/4	8,0	28,0	17	12
HGC040814	8/6	G1/4	8,0	29,0	17	14
HGC041014	10/8	G1/4	8,0	30,5	17	16
HGC040838	8/6	G3/8	9,0	30,5	19	14
HGC041038	10/8	G3/8	9,0	32,0	19	16
HGC041238	12/10	G3/8	9,0	32,5	19	19
HGC041012	10/8	G1/2	10,0	33,5	24	16
HGC041212	12/10	G1/2	10,0	34,5	24	19

HGC07 Diritto femmina



Codice	Ø	F	P	L	CH	CH1
HGC070618	6/4	G1/8	8,0	27,0	14	12
HGC070818	8/6	G1/8	8,0	28,0	14	14
HGC070614	6/4	G1/4	10,0	30,0	17	12
HGC070814	8/6	G1/4	10,0	31,0	17	14
HGC071014	10/8	G1/4	10,0	32,5	17	16
HGC070838	8/6	G3/8	11,5	32,5	20	14
HGC071038	10/8	G3/8	11,5	34,0	20	16
HGC071238	12/10	G3/8	11,5	35,0	20	19


HGC08 Raccordo a L femmina



Codice	Ø	F	P	L	L1	CH	CH1
HGC080618	6/4	G1/8	8,0	21,0	23,0	10	12
HGC080614	6/4	G1/4	10,0	24,0	24,0	11	12
HGC080818	8/6	G1/8	8,0	21,0	23,0	10	14
HGC080814	8/6	G1/4	10,0	24,0	26,0	11	14
HGC080838	8/6	G3/8	11,5	29,0	29,0	17	14
HGC081014	10/8	G1/4	10,0	24,0	25,0	11	16
HGC081038	10/8	G3/8	11,0	28,5	29,5	17	16
HGC081238	12/10	G3/8	11,0	29,5	29,5	17	19


5

HGC09 Gomito maschio conico




Codice	Ø	F	P	L	L1	CH	CH1
HGC090418	4/2	R1/8	8,0	17,0	20,0	9	9
HGC090518	5/3	R1/8	8,0	17,0	20,0	9	9
HGC090618	6/4	R1/8	8,0	17,0	22,0	9	12
HGC090818	8/6	R1/8	8,0	19,5	24,0	10	14
HGC091018	10/8	R1/8	8,0	20,5	25,5	11	16
HGC090614	6/4	R1/4	11,0	21,0	23,5	10	12
HGC090814	8/6	R1/4	11,0	21,0	24,0	10	14
HGC091014	10/8	R1/4	11,0	22,0	26,0	11	16
HGC090638	6/4	R3/8	11,0	22,0	25,5	11	12
HGC090838	8/6	R3/8	11,0	22,0	25,5	11	14
HGC091038	10/8	R3/8	11,0	22,0	26,0	11	16
HGC091238	12/10	R3/8	11,0	24,0	28,5	13	19
HGC090812	8/6	R1/2	8,0	19,5	24,0	10	14
HGC091012	10/8	R1/2	14,0	29,0	30,0	17	14
HGC091212	12/10	R1/2	18,0	29,0	30,0	17	19
HGC091512	15/12,5	R1/2	14,0	29,0	36,0	17	24

HGC10 Gomito orientabile con OR




Codice	Ø	F	P	L	L1	CH	CH1	CH2
HGC100618	6/4	G1/8	6,0	22,0	23,0	9	12	14
HGC100818	8/6	G1/8	6,0	24,0	30,0	10	14	14
HGC100614	6/4	G1/4	8,0	24,0	27,0	10	12	17
HGC100814	8/6	G1/4	8,0	24,0	30,0	10	14	17
HGC101014	10/8	G1/4	8,0	26,0	31,0	11	16	17
HGC100838	8/6	G3/8	9,0	24,0	31,0	10	14	19
HGC101038	10/8	G3/8	9,0	26,0	31,0	11	16	19
HGC101238	12/10	G3/8	9,0	28,5	31,0	13	19	19

HGC14 Raccordo a T maschio laterale conico



Codice	Ø	F	P	L	L1	CH	CH1
HGC140618	6/4	R1/8	8,0	33,0	22,5	8	12
HGC140614	6/4	R1/4	11,0	43,0	22,5	10	12
HGC140818	8/6	R1/8	8,0	32,0	25,0	10	14
HGC140814	8/6	R1/4	11,0	43,0	25,0	10	14
HGC140838	8/6	R3/8	11,0	48,0	25,0	11	14
HGC141014	10/8	R1/4	11,0	48,0	25,0	11	16
HGC141038	10/8	R3/8	11,0	23,5	22,0	11	12
HGC141012	10/8	R1/2	14,0	56,0	28,0	17	16
HGC141238	12/10	R3/8	11,0	50,5	28,5	11	19
HGC141212	12/10	R1/2	14,0	64,0	32,0	17	19
HGC141512	15/12,5	R1/2	14,0	54,0	35,0	17	24


HGC16 Raccordo a T maschio centrale conico

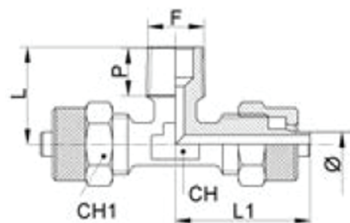

Codice	Ø	F	P	L	L1	CH	CH1
HGC160618	6/4	R1/8	8,0	16,0	22,5	8	12
HGC160614	6/4	R1/4	11,0	21,0	22,5	10	12
HGC160818	8/6	R1/8	8,0	19,5	23,0	10	14
HGC160814	8/6	R1/4	11,0	21,0	23,0	10	14
HGC160838	8/6	R3/8	11,0	11,0	23,5	11	14
HGC161014	10/8	R1/4	11,0	23,0	26,0	11	16
HGC161038	10/8	R3/8	11,0	23,0	26,5	11	16
HGC161012	10/8	R1/2	14,0	30,0	29,0	17	16
HGC161238	12/10	R3/8	11,0	23,0	26,5	11	19
HGC161212	12/10	R1/2	14,0	30,0	30,0	17	19
HGC161512	15/12,5	R1/2	14,0	28,0	36,0	17	24


5

HGC19 Diritto intermedio





Codice	Ø	Ø1	L	CH	CH1	CH2
HGC190600	6/4	6/4	35,0	12	12	12
HGC190800	8/6	8/6	37,0	12	14	14
HGC191000	10/8	10/8	40,0	14	16	16
HGC191200	12/10	12/10	38,0	17	19	19
HGC191500	15/12,5	15/12,5	48,0	22	24	24

HGC20 Gomito intermedio




Codice	Ø	L	CH	CH1
HGC200400	4/27	20	9	9
HGC200600	6/4	18,5	9	12
HGC200800	8/6	22,5	10	14
HGC201000	10/8	24	11	16
HGC201200	12/10	27,5	13	19
HGC201500	15/12,5	35	17	24

HGC21 T intermedio

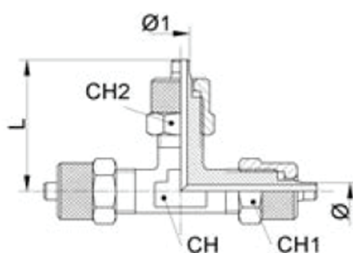

Codice	Ø	L	CH	CH1
HGC210400	4/2	22,0	8	9
HGC210600	6/4	25,5	8	12
HGC210800	8/6	23,0	10	14
HGC211000	10/8	25,5	11	16
HGC211200	12/10	28,5	11	19
HGC211500	15/12,5	35,0	17	24


HGC22 Raccordo a croce intermedio



Codice	Ø	L	CH	CH1
HGC220600	6/4	22,5	10	12
HGC220800	8/6	22,5	10	14
HGC221000	10/8	25,5	10	16


5

HGC30 Dado di bloccaggio




Codice	Ø	F	L	CH
HGC300400	4/2	M7x0,75	9,0	9
HGC300600	6/4	M10x1	9,0	9
HGC300800	8/6	M12x1	11,0	14
HGC301000	10/8	M14x1	11,5	16
HGC301200	12/10	M16x1	13,5	19
HGC301500	15/12,5	M20x1	15,5	24

HGC33 Diritto intermedio passalamiera



Codice	Ø	F	L	CH	CH1	MAX
HGC330610	6/4	M10x1	48,0	14	12	12,0
HGC330812	8/6	M12x1	50,0	17	14	12,0
HGC331014	10/8	M14x1	51,0	17	16	10,0
HGC331216	12/10	M16x1	52,0	19	19	10,0
HGC331520	15/12,5	M20x1	56,0	24	24	10,0

HGC40 Anello singolo



Codice	Ø	F	L	L1	CH	D1	E
HGC4004M5	4/2	M5	9,0	19,5	9	5,1	9,0
HGC4005M5	5/3	M5	9,0	19,5	9	5,1	9,0
HGC4006M5	6/4	M5	9,0	19,5	9	5,1	9,0
HGC400618	6/4	G1/8	14,5	24,0	12	9,9	14,0
HGC400818	8/6	G1/8	14,5	24,0	14	9,9	14,0
HGC400614	6/4	G1/4	14,5	26,0	12	13,3	18,0
HGC400814	8/4	G1/4	14,5	27,0	14	13,3	18,0
HGC401014	10/8	G1/4	14,5	28,0	16	13,3	18,0
HGC400838	8/6	G3/8	14,5	27,5	14	16,6	18,0
HGC401038	10/8	G3/8	14,5	29,0	14	16,6	21,0

Asta da utilizzare: HD42 - HD43 - HD44

